




FDV SPEC SHEET

Rod Midi C
Art. no: 102310-30-2-ddd

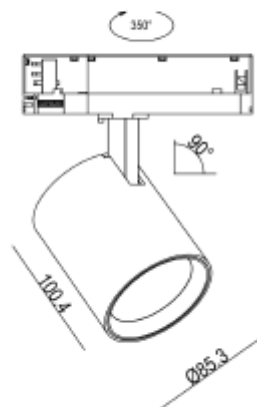

Rod Midi C



Art. no: 102310-30-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3150
Lumen LED (tc=25):	4100
Beam Angle:	30°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling

ELECTRICAL DATA

Dimming:	DALI2
Flickerfree:	Yes
Standby power P _{sb} (W) <:	0,5
Flicker metric (P _{st} LM) <:	0
Stroboscopic effect metric (SVM) <	0,003
System Power [W]:	23
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	38
Max load pr circuit - B16:	62
Max load pr circuit - C10:	39
Max load pr circuit - C16:	62
Leakage current [mA]:	0,39
Inrush current I _{max} [A]:	1,86
Inrush current time [µs]:	68
Socket / Cap-Base:	N/A
Current Output [mA]:	550



FDV SPEC SHEET

Rod Midi C
Art. no: 102310-30-2-ddd



PRODUCT	
Ingress Protection:	IP20
Operating Temperature [°C]:	0 - 35
Lifetime [h]:	L80B10: 100 000
Color:	Black
Height [mm]:	101
Diameter [mm]:	86
Weight [kg]:	0,54
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Polycarbonate