



PRODUCT SHEET

NDL190-B

Art. no: 102792-2-60-3


NORLUX®

Lighting Solutions

NDL190-B



Ø 160-170mm

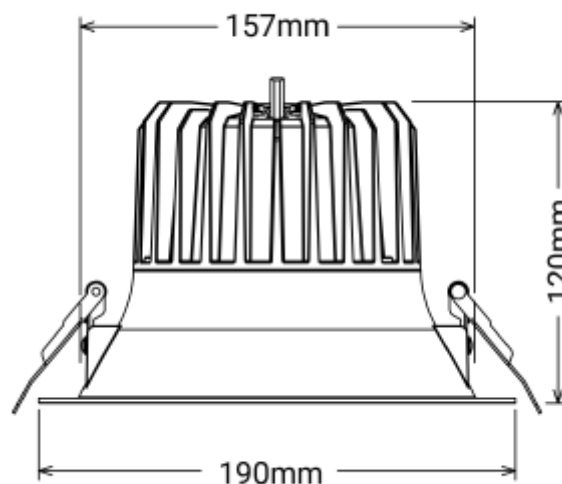

SPECIFICATIONS

| | |
|-------------------------------|---------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 18W |
| CCT (Color Temperature): | 4000K |
| CRI / Ra: | 90 |
| Lumen Output: | 2070lm |
| Lumen LED (tc=25): | 2300lm |
| Beam Angle: | 60° |
| Lens (Diffuser): | Clear |
| Dimming: | Depending on Driver |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | EPN0024 |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | 160-175mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 115lm/W |
| UGR (<=): | 19 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 190mm |
| Height [mm]: | 120mm |
| Width [mm]: | 190mm |
| Diameter [mm]: | 190mm |
| Weight [kg]: | 0,7kg |
| Emergency light [h]: | No Emergency light |
| Emergency light testing: | N/A |
| To be recessed in insulation: | Not applicable |