




FDV SPEC SHEET

Cylinder 60 G2
Art. no: 102260-36-2-ddd

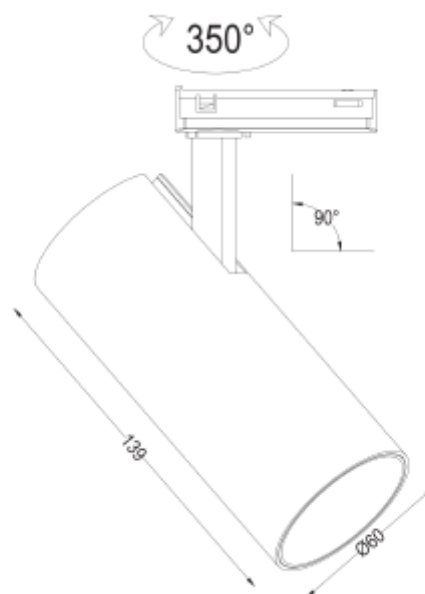

Cylinder 60 G2



Art. no: 102260-36-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1400
Lumen LED (tc=25):	2100
Beam Angle:	36
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling

ELECTRICAL DATA

Dimming:	DALI2
Flickerfree:	Yes
Standby power P _{sb} (W) <:	0,5
Flicker metric (P _{st} LM) <:	0
Stroboscopic effect metric (SVM) <	0,003
System Power [W]:	14
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	38
Max load pr circuit - B16:	62
Max load pr circuit - C10:	38
Max load pr circuit - C16:	62
Leakage current [mA]:	0,26
Inrush current I _{max} [A]:	1,86
Inrush current time [μs]:	68
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Emergency light [h]:	No Emergency light



FDV SPEC SHEET

Cylinder 60 G2
Art. no: 102260-36-2-ddd



PRODUCT	
Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Length [mm]:	130
Height [mm]:	130
Diameter [mm]:	60
Weight [kg]:	0,45
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Polycarbonate