




FDV SPEC SHEET

Tania Mini Basic

Art. no: 3561-3-18-2-ddd



51mm

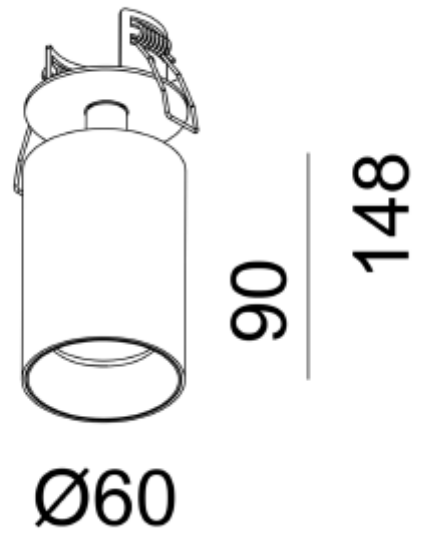

Tania Mini Basic



Art. no: 3561-3-18-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1050 |
| Lumen LED (tc=25): | 1550 |
| Beam Angle: | 18 |
| CCT (Color Temperature): | 2700 |
| CRI / Ra: | 90 |
| Color Code: | 927 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|---------------|-------------------|
| Connection: | Terminal |
| Cut-out [mm]: | Ø51 |
| Mounting: | Recessed, Ceiling |

ELECTRICAL DATA

| | |
|------------------------------------|-----------|
| Dimming: | DALI2 |
| Dimming Output Type: | AM+PWM |
| Flickerfree: | Yes |
| Standby power Psb (W) <: | 0,5 |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 14,5 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 33 |
| Max load pr circuit - B16: | 53 |
| Max load pr circuit - C10: | 42 |
| Max load pr circuit - C16: | 67 |
| Inrush current Imax [A]: | 13 |
| Inrush current time [µs]: | 30 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 350 |



FDV SPEC SHEET

Tania Mini Basic

Art. no: 3561-3-18-2-ddd



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| Length [mm]: | 90 |
| Diameter [mm]: | 60 |
| Housing Material : | Aluminium |