



PRODUCT SHEET


Zoom Mini Spotlight

Art. no: 7063-02-560-3-ddd

NORLUX®

Lighting Solutions

Zoom Mini Spotlight

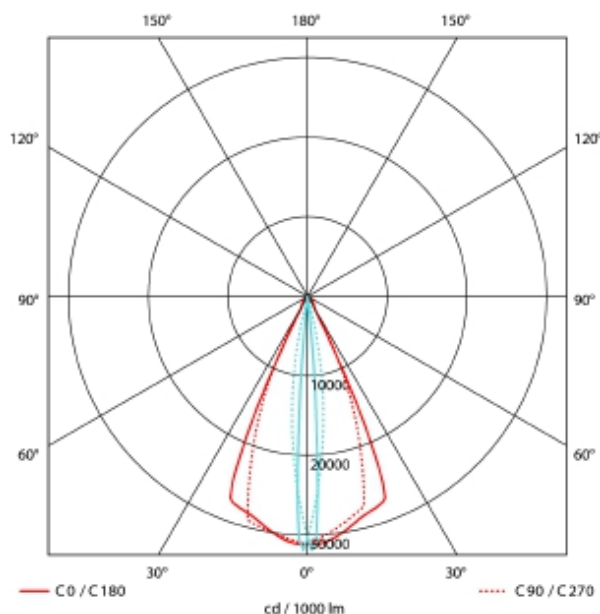

Zoom Mini is relatively small spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 5 - and 60 degrees making this model highly versatile. This Zoom Mini version comes with 2700 Kelvin and DALI2 driver. It's made from robust die-cast aluminum.



A++

SPECIFICATIONS

| | |
|--------------------------|------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 15W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 90 |
| Lumen LED (tc=25): | 1250lm |
| Beam Angle: | 5° -60° |
| Lens (Diffuser): | Clear |
| Dimming: | DALI2 |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Track 3-Circuit |
| Mounting: | Track, Ceiling |
| Lifetime [h]: | L80B10: 100 000h |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 261mm |
| Width [mm]: | 60mm |
| Weight [kg]: | 0,95kg |