



PRODUCT SHEET


LED Panel

Art. no: 0370-02-3

NORLUX®

Lighting Solutions


LED Panel

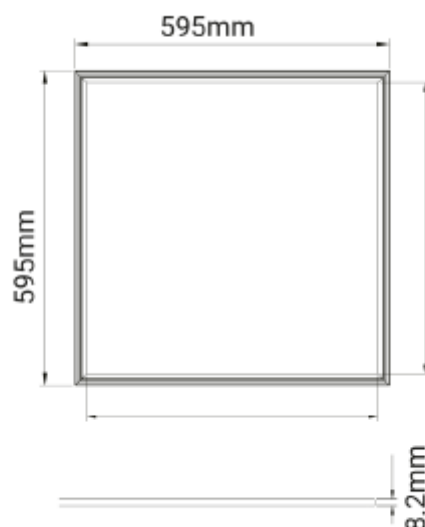

A++

SPECIFICATIONS

| | |
|--------------------------|-----------------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 41W |
| CCT (Color Temperature): | 3000-4000K |
| CRI / Ra: | 80 |
| Lumen Output: | 4186/4953lm |
| Lumen LED (tc=25): | 4600/5300lm |
| Beam Angle: | 110° |
| Lens (Diffuser): | Micropris. |
| Dimming: | Remote, Sensor (PIR), 1-10V |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i3 Quick connection |
| Mounting: | Recessed, Suspended |
| Lifetime [h]: | L80B50: 100 000h |
| Lumen/W: | 121lm/W |
| UGR (<=): | 19 |
| Color: | White |
| Length [mm]: | 595mm |
| Height [mm]: | 8,2mm |
| Width [mm]: | 595mm |
| Weight [kg]: | 2,85kg |

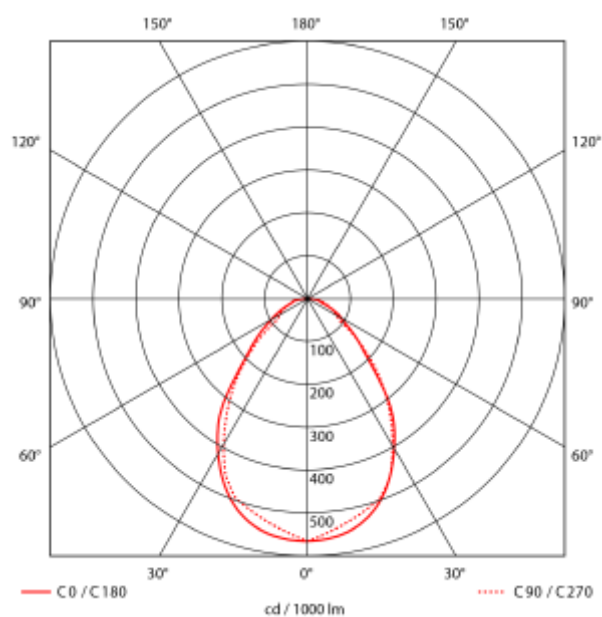

Panel LED is a light fixture for interior use with built-in PIR-sensor and daylight harvesting. It is constructed for fitting in to suspended ceilings. Panel LEDs can be installed as a pendant or mounted on ceiling surfaces. The Panel LED has an micro prismatic diffuser and a CCT-switch to select between 3000K and 4000K.

Factory settings are on for 10 min, then 20%-level for 30 min. After any motion, the sensor will be on for another 10 min. The settings can be changed by DIP-switch or or a remote control. To use daylight harvesting, remote control must be used (optional).

Driver is included, preset to 1050mA, but can be adjusted to 600mA by DIP-switch in 50mA steps. Can't be delivered with DALI.