




FDV SPEC SHEET

Z Line Louvre

Art. no: 101240-E-02-3

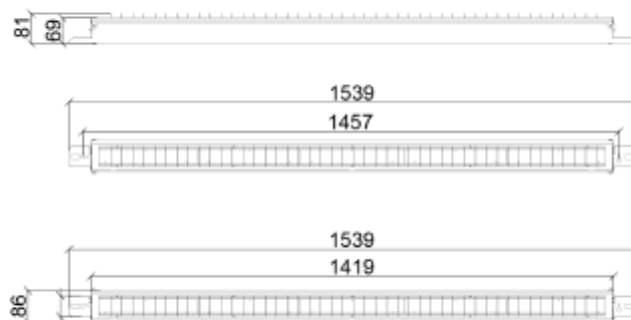

Z Line Louvre



Art. no: 101240-E-02-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	6470
Lumen LED (tc=25):	8500
Beam Angle:	110°
CCT (Color Temperature):	2700
CRI / Ra:	80
Color Code:	827
Lens (Diffuser):	Crossblade

ELECTRICAL DATA

Dimming:	None
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	46
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	16
Max load pr circuit - B16:	26
Max load pr circuit - C10:	27
Max load pr circuit - C16:	43
Leakage current [mA]:	0,5
Inrush current I _{max} [A]:	41
Inrush current time [μs]:	124
Current Output [mA]:	350

MOUNTING / CONNECTION

Connection:	18i5 Quick connection
Mounting:	Ceiling, Surface



FDV SPEC SHEET

Z Line Louvre

Art. no: 101240-E-02-3



PRODUCT	
Ingress Protection:	IP20
Operating Temperature [°C]:	0 - 25
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9016
Length [mm]:	1539
Height [mm]:	86
Width [mm]:	92
Weight [kg]:	4,5
Housing Material :	Aluminium