




FDV SPEC SHEET

Sircular Pendant
Art. no: 101300-120-2-ddd

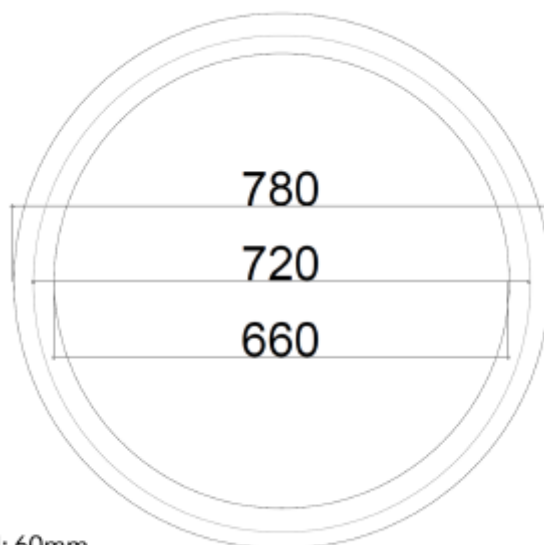

H: 60mm
B: 60mm

Sircular Pendant



Art. no: 101300-120-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3372
Lumen LED (tc=25):	3500
Beam Angle:	120°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	5
Lens (Diffuser):	Opal
UGR (<=):	22

MOUNTING / CONNECTION

Connection:	Cable 2m
Mounting:	Pendant, Ceiling

ELECTRICAL DATA

Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
System Power [W]:	35
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	35
Max load pr circuit - B16:	56
Max load pr circuit - C10:	35
Max load pr circuit - C16:	56
Leakage current [mA]:	0,75
Inrush current I _{max} [A]:	7,65
Inrush current time [μs]:	186



FDV SPEC SHEET

Sircular Pendant
Art. no: 101300-120-2-ddd



PRODUCT	
Ingress Protection:	IP20
Impact Protection:	IK09
Operating Temperature [°C]:	-30 - 55
Lifetime [h]:	L80B20: 50 000
Color:	Black
Length [mm]:	60
Height [mm]:	60
Diameter [mm]:	780
Weight [kg]:	5,5
Housing Material :	Aluminium
Diffuser Material:	Polycarbonate