




## FDV SPEC SHEET

Flare 40 48V

Art. no: 101475-35-3-ddd

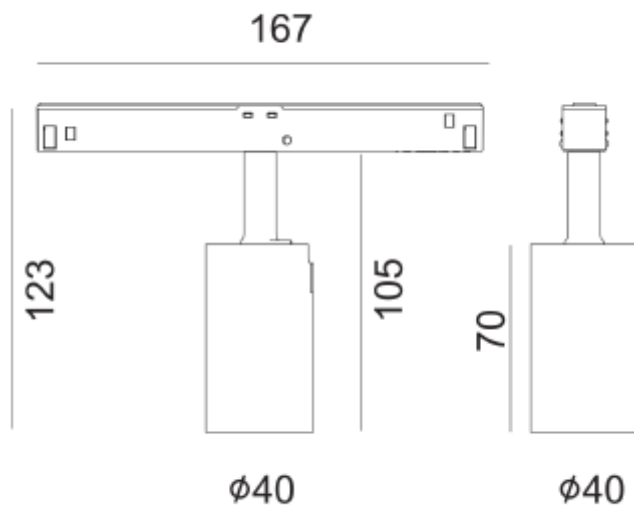

## Flare 40 48V

IP20



CE

A++ - A

Art. no: 101475-35-3-ddd

### LIGHT TECHNICAL

|                          |      |
|--------------------------|------|
| Lumen Output:            | 640  |
| Lumen LED (tc=25):       | 640  |
| Beam Angle:              | 35°  |
| CCT (Color Temperature): | 2700 |
| CRI / Ra:                | 90   |
| Color Code:              | 927  |
| MacAdam (SDCM):          | 3    |

### MOUNTING / CONNECTION

|             |               |
|-------------|---------------|
| Connection: | Track EVO 48V |
| Mounting:   | Track         |

### PRODUCT

|                     |       |
|---------------------|-------|
| Ingress Protection: | IP20  |
| Color:              | White |
| Length [mm]:        | 105   |
| Width [mm]:         | 40    |
| Diameter [mm]:      | 40    |

### ELECTRICAL DATA

|                          |                      |
|--------------------------|----------------------|
| Dimming:                 | DALI                 |
| Standby power Psb (W) <: | 0,5                  |
| System Power [W]:        | 6,6                  |
| System Voltage [V]:      | 48VDC                |
| Dimming Output Type:     | Amplitude Modulation |
| Protection Class:        | 3                    |
| Socket / Cap-Base:       | N/A                  |
| Current Output [mA]:     | 700                  |
| Voltage Forward Min [V]: | 8,6                  |
| Voltage Forward Max [V]: | 10,2                 |