




## FDV SPEC SHEET

Flare 40 48V

Art. no: 101476-35-3-ddd

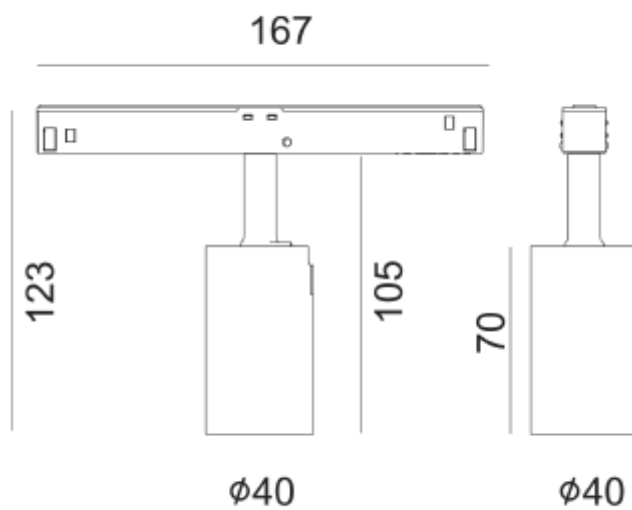

## Flare 40 48V

IP20



CE

A++ - A

Art. no: 101476-35-3-ddd

### LIGHT TECHNICAL

Lumen Output:	670
Lumen LED (tc=25):	670
Beam Angle:	35°
CCT (Color Temperature):	3000
CRI / Ra:	9
Color Code:	930
MacAdam (SDCM):	3

### MOUNTING / CONNECTION

Connection:	Track EVO 48V
Mounting:	Track

### PRODUCT

Ingress Protection:	IP20
Color:	White
Length [mm]:	105
Width [mm]:	40
Diameter [mm]:	40

### ELECTRICAL DATA

Dimming:	DALI
Standby power Psb (W) <:	0,5
System Power [W]:	6,6
System Voltage [V]:	48VDC
Dimming Output Type:	Amplitude Modulation
Protection Class:	3
Socket / Cap-Base:	N/A
Current Output [mA]:	700
Voltage Forward Min [V]:	8,6
Voltage Forward Max [V]:	10,2