




FDV SPEC SHEET

Plaza Up&Down 900lm 830 15°-210° 10W BK

Art. no: 101510-2

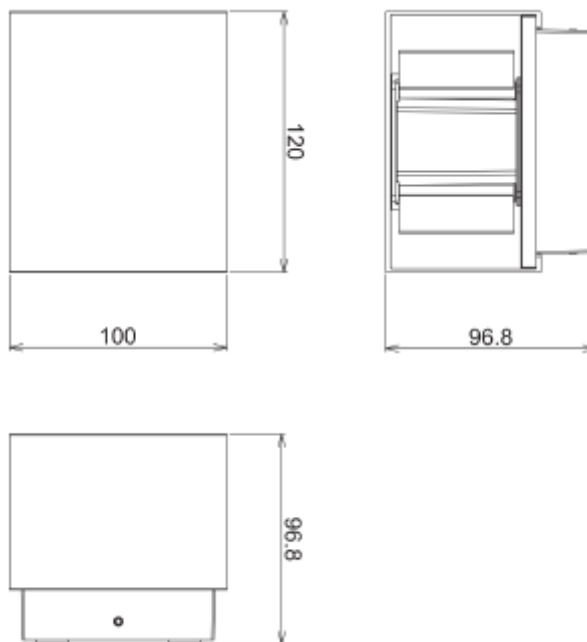

Plaza Up&Down 900lm 830 15°-210° 10W BK



Art. no: 101510-2

LIGHT TECHNICAL

| | |
|--------------------------|----------|
| Lumen Output: | 830 |
| Lumen LED (tc=25): | 900 |
| Beam Angle: | 15°-210° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|--------------|
| Connection: | QuickConnect |
| Mounting: | Wall |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | None |
| System Power [W]: | 10 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 111 |
| Max load pr circuit - B16: | 178 |
| Max load pr circuit - C10: | 111 |
| Max load pr circuit - C16: | 178 |
| Leakage current [mA]: | 0,75 |
| Inrush current I _{max} [A]: | 5,76 |
| Inrush current time [μs]: | 110 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 140 |



FDV SPEC SHEET

Plaza Up&Down 900lm 830 15°-210° 10W BK

Art. no: 101510-2



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP65 |
| Impact Protection: | IK06 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| RAL: | RAL9005 |
| Length [mm]: | 120 |
| Height [mm]: | 100 |
| Width [mm]: | 96,8 |
| Weight [kg]: | 0,6 |
| Housing Material : | Aluminium |