



PRODUCT SHEET


Celestial Plafond

Art. no: 101571-120-3-ddd

NORLUX®

Lighting Solutions

Celestial Plafond

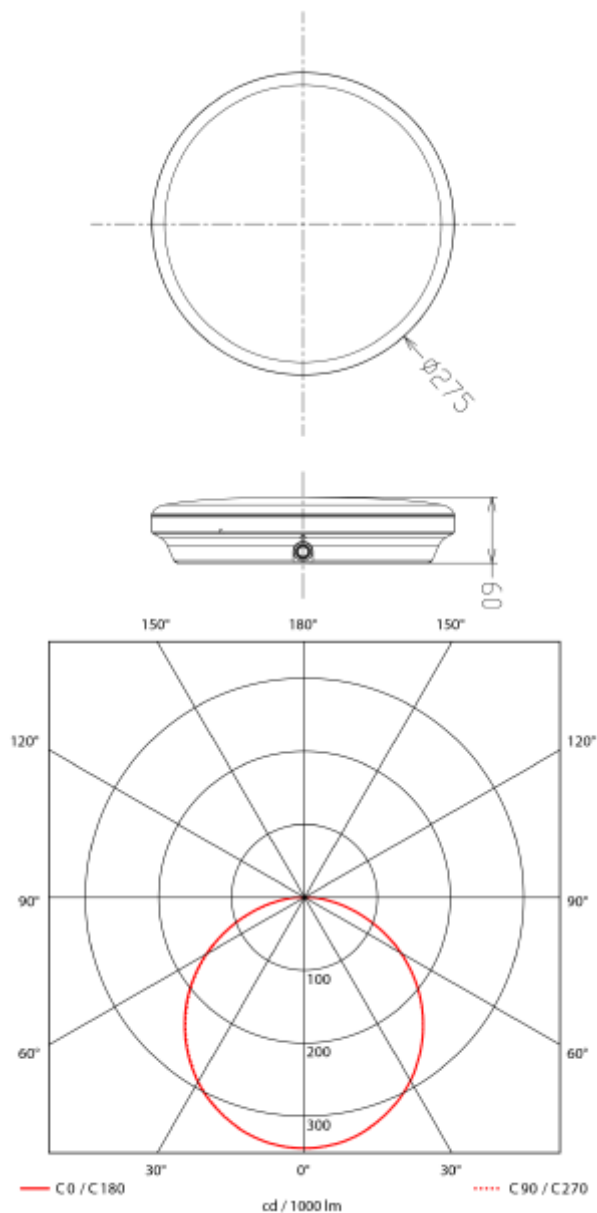

SPECIFICATIONS

| | |
|--------------------------|-------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 18W |
| CCT (Color Temperature): | 2700-3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 1913lm |
| Lumen LED (tc=25): | 2100lm |
| Beam Angle: | 120° |
| Lens (Diffuser): | Opal |
| Dimming: | DALI, DALI2, Push |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Ceiling, Wall |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 106lm/W |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 60mm |
| Width [mm]: | 275mm |
| Weight [kg]: | 0,75kg |

Dimmable surface mounted ceiling light with PC diffuser and even light output. IP54 waterproof structural design, its an ideal replacement for wet locations. Comes with a switch option between 2700K(default)and 3000K. Dimmable by phasecut or DALI2. QuickConnect for easy installation.