



## PRODUCT SHEET


Celestial Plafond

Art. no: 101575-120-3-ddd

# NORLUX®

Lighting Solutions

## Celestial Plafond

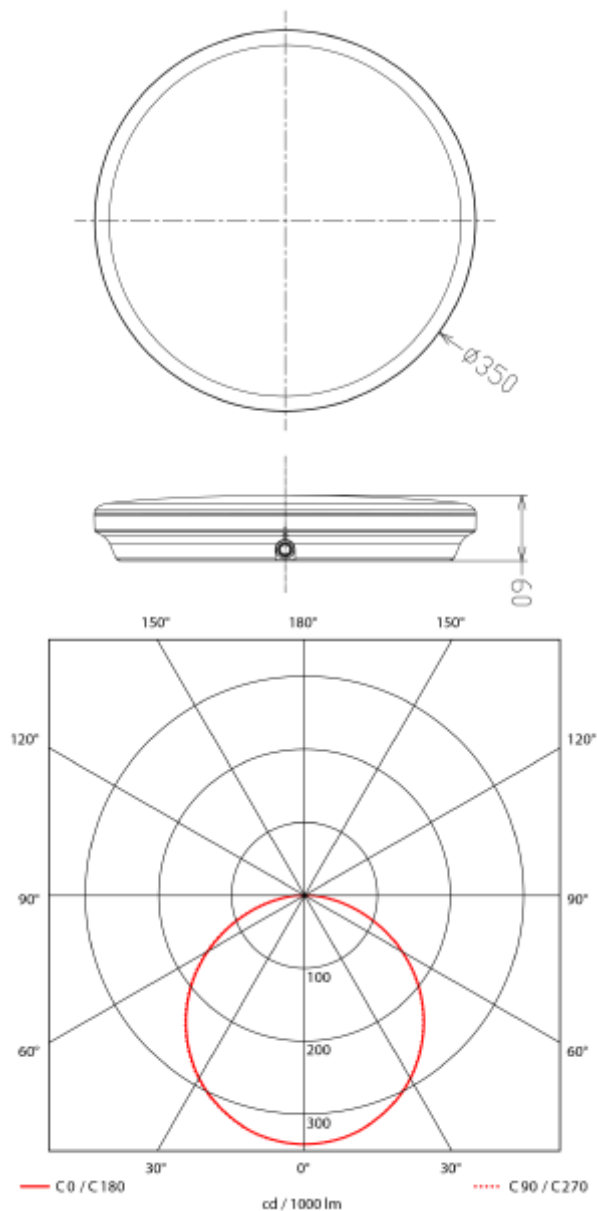

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	25W
CCT (Color Temperature):	2700-3000K
CRI / Ra:	80
Lumen Output:	2750lm
Lumen LED (tc=25):	2900lm
Beam Angle:	120°
Lens (Diffuser):	Opal
Dimming:	DALI, DALI2, Push
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Ceiling, Wall
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	110lm/W
MacAdam (SDCM):	3
Color:	White
Height [mm]:	60mm
Width [mm]:	350mm
Weight [kg]:	1,25kg

Dimmable surface mounted ceiling light with PC diffuser and even light output. IP54 waterproof structural design, its an ideal replacement for wet locations. Comes with a switch option between 2700K(default)and 3000K. Dimmable by phasecut or DALI2. QuickConnect for easy installation.