




PRODUCT SHEET

Duna

Art. no: 10184745



Duna

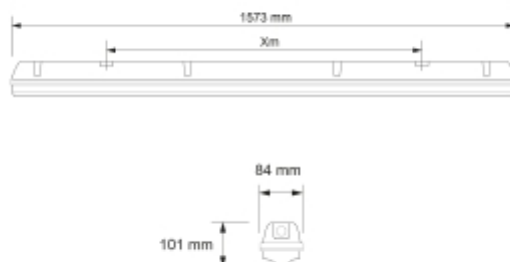

SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	46W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	5600lm
Lens (Diffuser):	PC Opal
Dimming:	Sensor (MW)
System Voltage [V]:	230V 50Hz
Connection:	Terminal
Mounting:	Ceiling, Surface, Wall
Lifetime [h]:	50 000h
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	Grey
Length [mm]:	1573mm
Height [mm]:	101mm
Width [mm]:	84mm
Weight [kg]:	2,2kg

Duna is a sealed industrial light fixture for ceiling surface mounting, indoor or outdoor under a roof. Duna is classified in accordance with IP66 / IK08. The light fixture is made from robust fiberglass and is equipped with a semi-opal PC diffuser. 5x2,5mm2 through-wiring with PG-nipple.

Has built in microwave/ daylight-sensor (on/off) and can control 5 pcs of 10178295 or 10199057.
Sensitivity range: 1m - 8 m. Hold time: 10 s - 60 min. Light threshold: 2 lux - 2000 lux.