




FDV SPEC SHEET

Tania Mini Slim Surface

Art. no: 101931-36-3-p

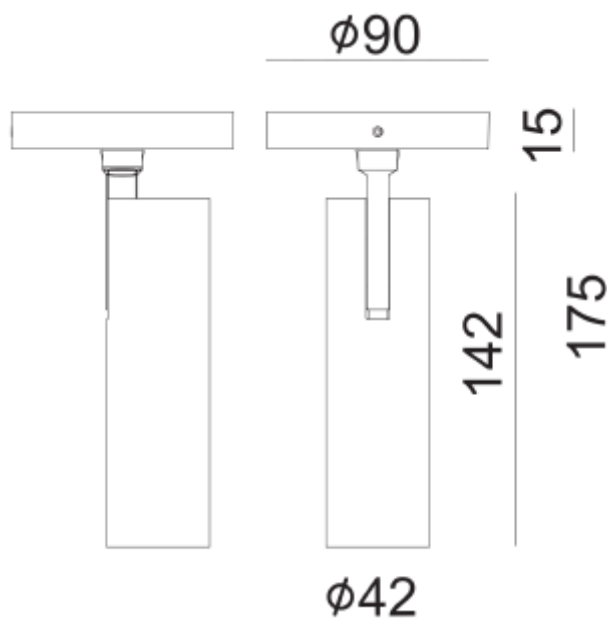

Tania Mini Slim Surface



Art. no: 101931-36-3-p

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 764 |
| Lumen LED (tc=25): | 850 |
| Beam Angle: | 36° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 90 |
| Color Code: | 930 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|------------------|
| Connection: | Terminal |
| Mounting: | Ceiling, Surface |

ELECTRICAL DATA

| | |
|--------------------------------------|---------------|
| Dimming: | Phase-Cut |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 9 |
| System Voltage [V]: | 230V 50Hz |
| Dimming Phasecut Type: | Trailing edge |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 125 |
| Max load pr circuit - B16: | 200 |
| Max load pr circuit - C10: | 125 |
| Max load pr circuit - C16: | 200 |
| Inrush current I _{max} [A]: | 5 |
| Inrush current time [μs]: | 100 |
| Voltage Forward Min [V]: | 32,3 |
| Voltage Forward Max [V]: | 38,1 |



FDV SPEC SHEET

Tania Mini Slim Surface

Art. no: 101931-36-3-p



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| RAL: | RAL9003 |
| Height [mm]: | 142 |
| Diameter [mm]: | 42 |