




FDV SPEC SHEET

Cylinder 60 G2
Art. no: 102261-36-2-ddd

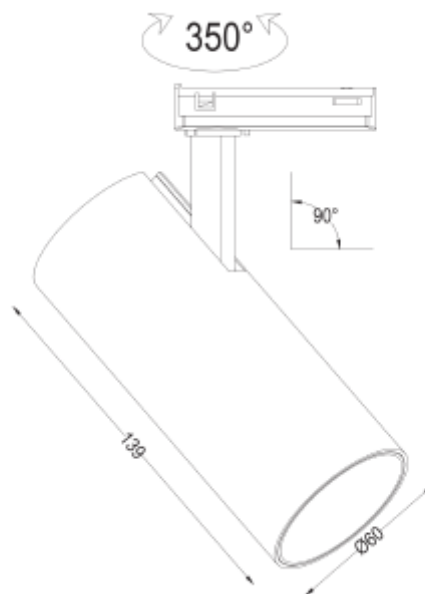

Cylinder 60 G2



Art. no: 102261-36-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1420 |
| Lumen LED (tc=25): | 2100 |
| Beam Angle: | 36° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 90 |
| Color Code: | 930 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |
| UGR (<=): | 19 |

MOUNTING / CONNECTION

| | |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting: | Track, Ceiling |

ELECTRICAL DATA

| | |
|--------------------------|--------------------|
| Dimming: | DALI |
| Flickerfree: | Yes |
| System Power [W]: | 15 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 350 |
| Voltage Forward Min [V]: | 32 |
| Voltage Forward Max [V]: | 36,2 |
| Emergency light [h]: | No Emergency light |



FDV SPEC SHEET

Cylinder 60 G2

Art. no: 102261-36-2-ddd



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| RAL: | RAL9005 |
| Length [mm]: | 130 |
| Height [mm]: | 130 |
| Diameter [mm]: | 60 |
| Weight [kg]: | 0,47 |
| Housing Material : | Aluminium |
| Diffuser Material: | Aluminium |
| Material 2: | Polycarbonate |