



PRODUCT SHEET


Benu Slim Office DALI

Art. no: 102521-140-2-ddd

NORLUX®

Lighting Solutions


Benu Slim Office DALI

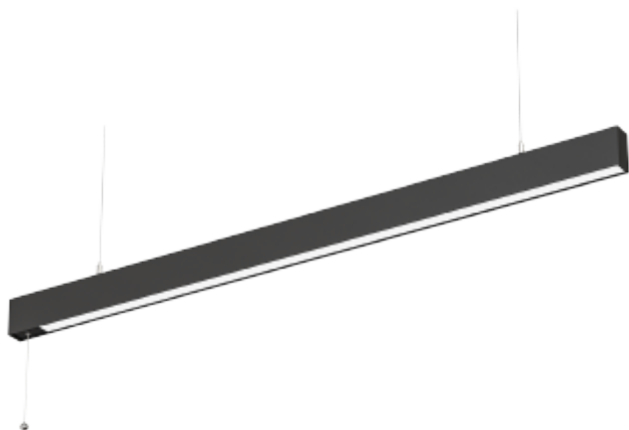

E

SPECIFICATIONS

| | |
|--------------------------|----------------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 50W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 90 |
| Lumen Output: | 6117lm |
| Lumen LED (tc=25): | 8216.75lm |
| Beam Angle: | 120° / 80° |
| Lens (Diffuser): | Micropris. |
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i5 DALI Quick connection |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 121lm/W |
| UGR (<=): | 19 |
| MacAdam (SDCM): | 3 |
| Through-wiring (mm2): | 5x0,75 |
| Color: | Black |
| Length [mm]: | 1206mm |
| Height [mm]: | 70mm |
| Width [mm]: | 35mm |
| Weight [kg]: | 2kg |

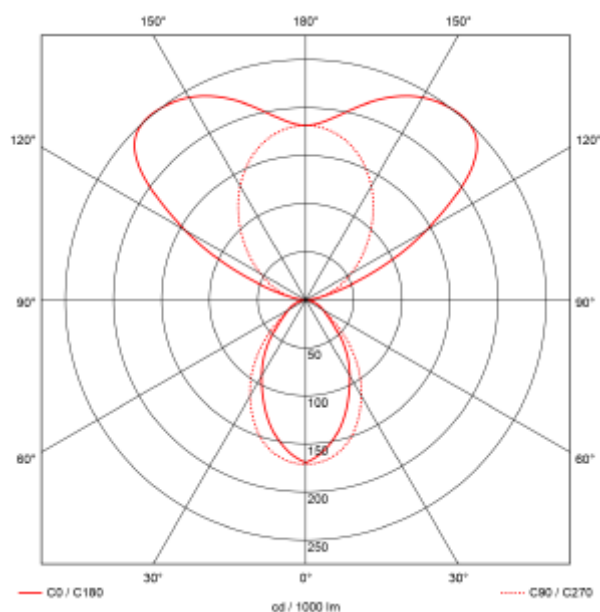

Benu Slim is ideal for offices, meeting rooms, and other workspaces that require good lighting. With an impressive color rendering index (CRI) of 90 and a warm color temperature of 3000K, this LED luminaire creates a comfortable atmosphere. With a luminous flux of 7800lm and an efficiency of 138 lm/W, it provides powerful and energy-efficient lighting. The product has a length of 1200mm, width of 35mm, height of 70mm, and an IP rating of IP20, making it suitable for office spaces.