



PRODUCT SHEET


Orion G2

Art. no: 102616-E-120-1

NORLUX®


Lighting Solutions

Orion G2

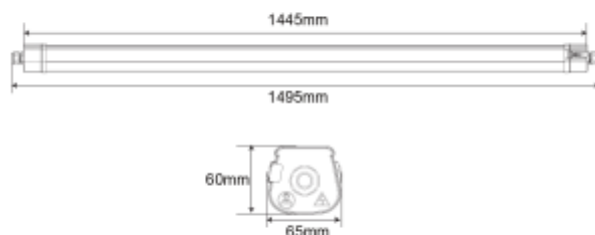

SPECIFICATIONS

Lightsource Type:	LED (replaceable)
System Power [W]:	40/34/28/23W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	6000lm
Lumen LED (tc=25):	6600lm
Beam Angle:	120°
Lens (Diffuser):	Frosted
Dimming:	Emergency
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Surface, Suspended
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	150lm/W
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	Grey
Length [mm]:	1525mm
Height [mm]:	60mm
Width [mm]:	65mm
Weight [kg]:	1,45kg
Emergency light [h]:	3 hours
Emergency light testing:	Selftest
Emergency lumen out [lm]:	350lm

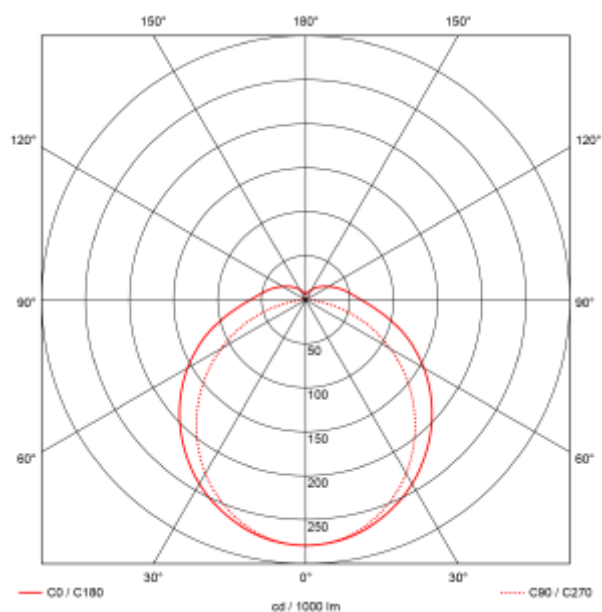

Orion is an energy-efficient industrial luminaire. With IP65 and IK08, it is suitable for use in tough environments both indoors and outdoors, in wet and dusty surroundings. The luminaire is equipped with a power switch where you can easily change the output via a DIP switch. Through-wiring for series installation and QuickConnect for easy installation. This product is also available with a microwave sensor with wireless communication between luminaires, using the Norlux Wireless Connect system for control.