



## PRODUCT SHEET

Ceto R

Art. no: 102791-36-3


# NORLUX®

Lighting Solutions

## Ceto R




160-170mm

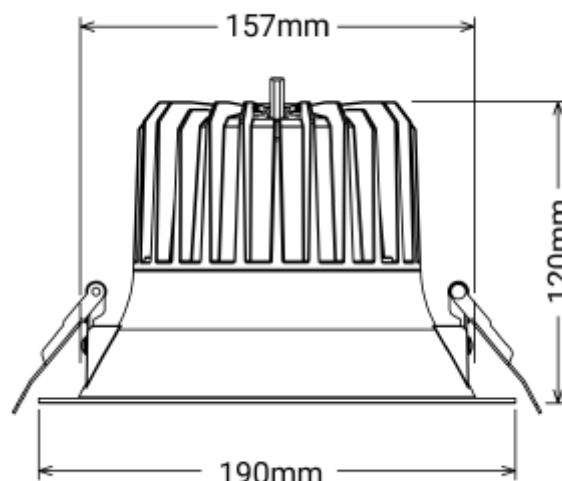

### SPECIFICATIONS

|                               |                       |
|-------------------------------|-----------------------|
| Lightsource Type:             | LED (built in)        |
| System Power [W]:             | 18W                   |
| CCT (Color Temperature):      | 3000K                 |
| CRI / Ra:                     | 90                    |
| Lumen Output:                 | 1900lm                |
| Lumen LED (tc=25):            | 2100lm                |
| Beam Angle:                   | 36°                   |
| Lens (Diffuser):              | Clear                 |
| Dimming:                      | Phase-Cut             |
| Flickerfree:                  | Yes                   |
| System Voltage [V]:           | 230V 50Hz             |
| Connection:                   | 18i3 Quick connection |
| Mounting:                     | Recessed              |
| Cut-out [mm]:                 | 160-175mm             |
| Lifetime [h]:                 | L80B10: 100 000h      |
| Lumen/W:                      | 105lm/W               |
| UGR (<=):                     | 19                    |
| MacAdam (SDCM):               | 3                     |
| Color:                        | White                 |
| Length [mm]:                  | 190mm                 |
| Height [mm]:                  | 120mm                 |
| Width [mm]:                   | 190mm                 |
| Diameter [mm]:                | 190mm                 |
| Weight [kg]:                  | 0,7kg                 |
| Emergency light [h]:          | No Emergency light    |
| Emergency light testing:      | N/A                   |
| To be recessed in insulation: | Not applicable        |

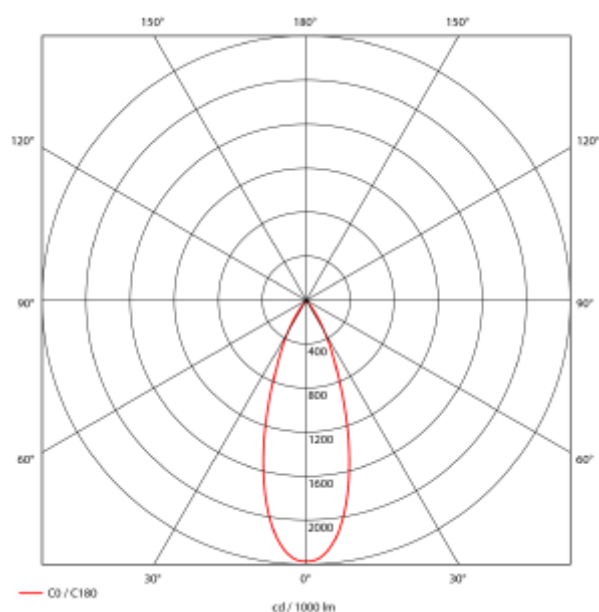

Ceto R is an elegant retrofit lighting product, ideal for use in corridors, offices, stores, and hotels to create a pleasant atmosphere. With an impressive CRI, CCT, and lumens per watt, Ceto R provides high-quality lighting that meets various needs. The product has an optimal size, with a cutout diameter of Ø160-175mm, making it perfect for replacing older retrofit lighting.