



## FDV SPEC SHEET

Cold 10


Art. no: 1111-30-3

# NORLUX®

Lighting Solutions



250x36mm

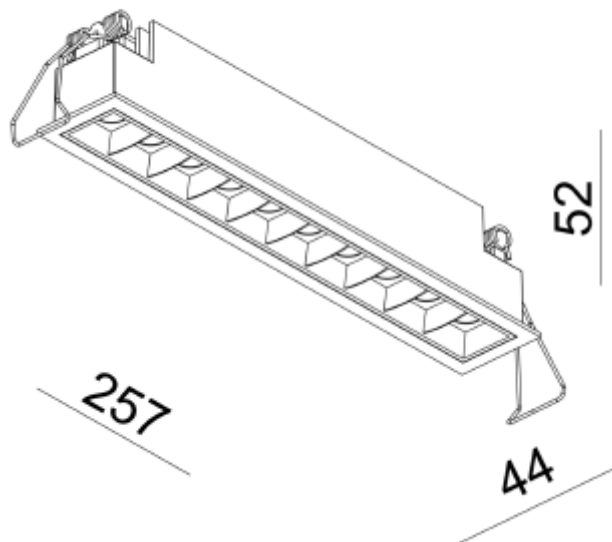

## Cold 10



Art. no: 1111-30-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1844
Lumen LED (tc=25):	2100
Beam Angle:	30°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
Lens (Diffuser):	None

### MOUNTING / CONNECTION

Connection:	Depending on driver
Cut-out [mm]:	250x36
Mounting:	Recessed, Ceiling



## FDV SPEC SHEET

Cold 10

Art. no: 1111-30-3



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	No	UGR (<=):	13
Ingress Protection:	IP20	Dimming:	Depending on Driver
Lifetime [h]:	L80B10: 100 000	Dimming Output Type:	Amplitude Modulation
Color:	White	Dimming Phasecut Type:	Leading / Trailing edge
Length [mm]:	257	Flickerfree:	Yes
Height [mm]:	52	Flicker metric (Pst LM) <:	1
Width [mm]:	44	Stroboscopic effect metric (SVM) <	0,4
Weight [kg]:	0,7	System Power [W]:	2x10
Housing Material :	Aluminium	System Voltage [V]:	230V 50Hz
Material 2:	Mechanical installed part (Steel)	Protection Class:	3
		Max load pr circuit - B10:	35
		Max load pr circuit - B16:	56
		Max load pr circuit - C10:	74
		Max load pr circuit - C16:	118
		Leakage current [mA]:	7
		Inrush current I <sub>max</sub> [A]:	5
		Inrush current time [µs]:	300
		Socket / Cap-Base:	N/A
		Current Output [mA]:	700
		Voltage Forward Max [V]:	30