



## PRODUCT SHEET

Cold 10

Art. no: 1111-30-3


# NORLUX®

Lighting Solutions

## Cold 10




250x36mm

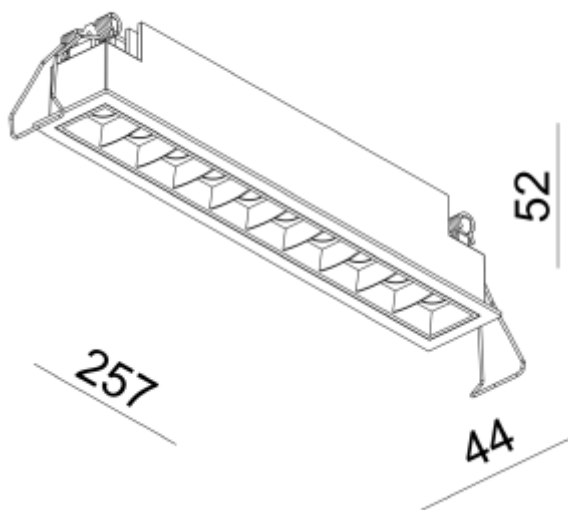

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	2x10W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	1844lm
Lumen LED (tc=25):	2100lm
Beam Angle:	30°
Lens (Diffuser):	None
Dimming:	Depending on Driver
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Depending on driver
Mounting:	Recessed, Ceiling
Cut-out [mm]:	250x36mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	89lm/W
UGR (<=):	13
Color:	White
Length [mm]:	257mm
Height [mm]:	52mm
Width [mm]:	44mm
Weight [kg]:	0,7kg
To be recessed in insulation:	No

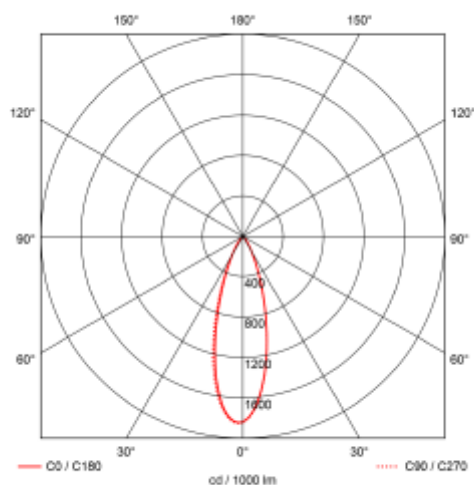

Med sin rektangulære form og inntrukket lyskilde har Cold downlight et unikt dekorativt design som egner seg i de fleste rom. Frontring leveres i flere farger og byttes enkelt ut. Driver medfølger ikke, se tilbehør for alternativ farge på front ring. DALI2: IE25D-03 Driver 350-700mA cc 25W DALI2 EPN0034 & 18i5DALI DALI2: 0300-17 Driver DALI 700mA max 35W 25-50V (one4all) 18i5 DALI/EPN0034 Fasekutt: D70030NTF-02 Driver 700mA cc 30W (21-43V) Phasecut

JB&2021-12-17T19:25:04.022Z"}, {"name": {"en": "Power (system) (W)", "nb": "Effekt (system) (W)", "importCode": "pa\_effect", "dataType": "TEXT", "range": false, "value": {"nb": "2x10"}, "data": {"nb": "Elektriske data"}, "attributeGroupSortNo": 1, "modifiedTime": "2021-12-17T19:25:04.561Z"}, {"name": {"en": "power if switch (W)", "nb": "Forhåndsinnstilt effekt hvis bryter (W)", "importCode": "preset\_power", "dataType": "TEXT", "range": false, "sortNo": 3, "attributeGroupSortNo": 1, "modifiedTime": "2021-12-17T19:25:04.561Z"}, {"name": {"en": "power (W)", "nb": "Effekt (W)", "importCode": "power", "dataType": "TEXT", "range": false, "value": {"nb": "2x10"}, "data": {"nb": "Elektriske data"}, "attributeGroupSortNo": 1, "modifiedTime": "2021-12-17T19:25:04.561Z"}]