



PRODUCT SHEET

Cold 5


Art. no: 1118-30-3

NORLUX®

Lighting Solutions

Cold 5

130x36mm

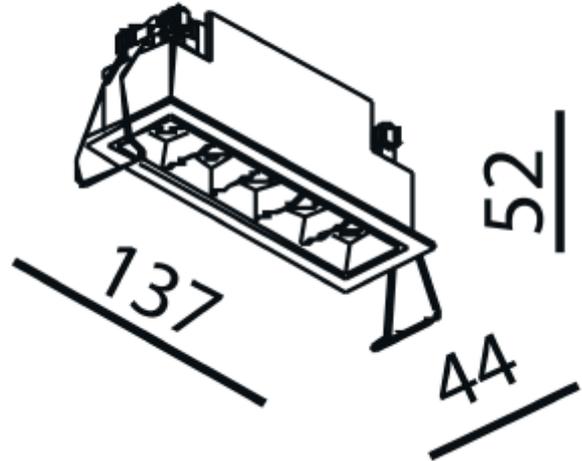

With its rectangular and recessed light source, Cold downlight has a unique design that is suitable for most rooms. Front ring is available in several different colors and can easily be replaced. Driver is not included. Please see accessories for recommended driver and alternative colors for front ring.



A⁺⁺

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	10W
CCT (Color Temperature):	4000K
CRI / Ra:	90
Lumen Output:	805lm
Lumen LED (tc=25):	1100lm
Beam Angle:	30°
Lens (Diffuser):	None
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Connection:	Depending on driver
Mounting:	Recessed, Ceiling
Cut-out [mm]:	Ø130x36mm
Lifetime [h]:	L80B10: 100 000h
MacAdam (SDCM):	2
Color:	White
Length [mm]:	137mm
Height [mm]:	52mm
Width [mm]:	44mm
Weight [kg]:	0,32kg
To be recessed in insulation:	No