



FDV SPEC SHEET


Leila

Art. no: 15072-01-3-ddd

NORLUX®

Lighting Solutions

190mm

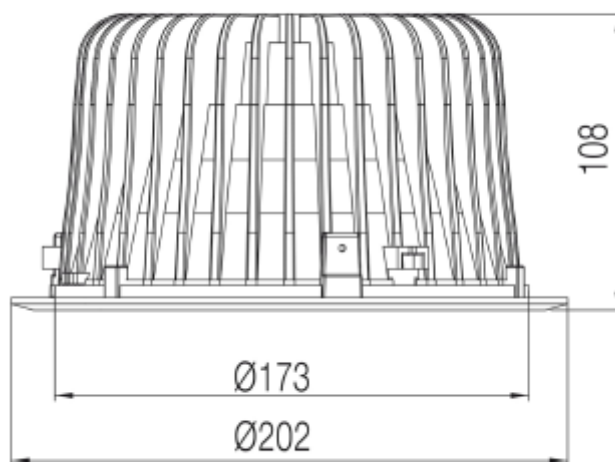

Leila



Art. no: 15072-01-3-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1877
Lumen LED (tc=25):	2340
Beam Angle:	72°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	18i5 DALI Quick connection
Cut-out [mm]:	Ø190
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

UGR (<=):	22
Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
System Power [W]:	25
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	19
Max load pr circuit - B16:	32
Max load pr circuit - C10:	31
Max load pr circuit - C16:	53
Leakage current [mA]:	0,15
Inrush current I _{max} [A]:	26
Inrush current time [µs]:	151
Current Output [mA]:	700



FDV SPEC SHEET

Leila

Art. no: 15072-01-3-ddd



PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	White
Height [mm]:	108
Width [mm]:	202
Weight [kg]:	1,15