




FDV SPEC SHEET

Leila

Art. no: 15073-01-5-ddd



190mm

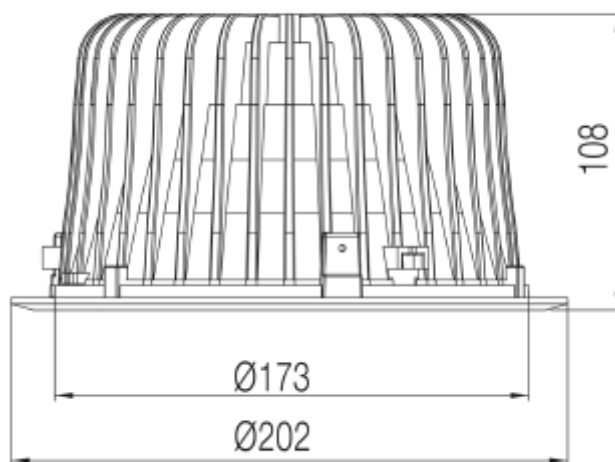

Leila



Art. no: 15073-01-5-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1962 |
| Lumen LED (tc=25): | 2340 |
| Beam Angle: | 72° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| Lens (Diffuser): | Opal |

MOUNTING / CONNECTION

| | |
|---------------|----------------------------|
| Connection: | 18i5 DALI Quick connection |
| Cut-out [mm]: | Ø190 |
| Mounting: | Recessed, Ceiling |

PRODUCT

| | |
|-------------------------------|-----------------|
| To be recessed in insulation: | No |
| Ingress Protection: | IP20 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| Height [mm]: | 108 |
| Width [mm]: | 202 |
| Weight [kg]: | 1,15 |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| UGR (<=): | 22 |
| Dimming: | DALI |
| System Power [W]: | 25 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 55 |
| Max load pr circuit - B16: | 90 |
| Max load pr circuit - C10: | 65 |
| Max load pr circuit - C16: | 100 |
| Inrush current I _{max} [A]: | 8 |
| Inrush current time [µs]: | 100 |
| Current Output [mA]: | 700 |