



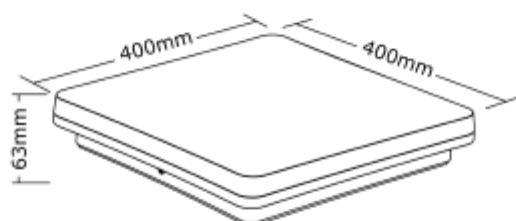

## FDV SPEC SHEET

Pollux Square

Art. no: 2116-120-3

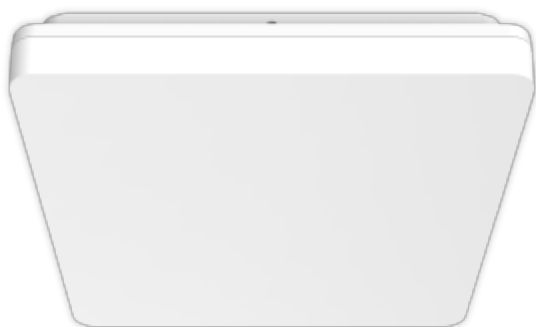

# Pollux Square



Art. no: 2116-120-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3400(4000K)
Lumen LED (tc=25):	3700
Beam Angle:	120
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Color Code:	830/840/857
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

### MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Ceiling, Surface

### ELECTRICAL DATA

Dimming:	None
Dimming Output Type:	PWM
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	30
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	22
Max load pr circuit - B16:	35
Max load pr circuit - C10:	22
Max load pr circuit - C16:	35
Leakage current [mA]:	0,75
Inrush current Imax [A]:	18,4
Inrush current time [µs]:	16
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Pollux Square

Art. no: 2116-120-3



PRODUCT	
Ingress Protection:	IP54
Impact Protection:	IK10
Lifetime [h]:	L80B50: 50 000
Color:	White
Length [mm]:	400
Height [mm]:	63
Width [mm]:	400