





FDV SPEC SHEET

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH

Art. no: 2117-110-3

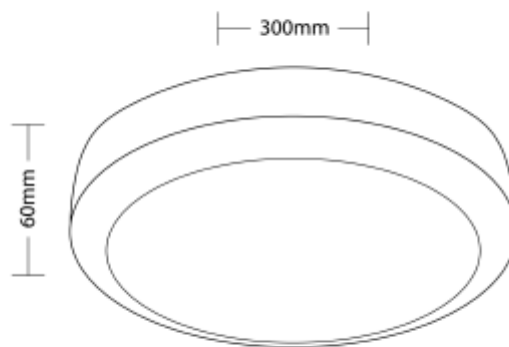

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH



Art. no: 2117-110-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1318 (3000K) |
| Lumen LED (tc=25): | 1500 |
| Beam Angle: | 110° |
| CCT (Color Temperature): | 3/4/5700 |
| CRI / Ra: | 80 |
| Color Code: | 830/840/857 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Opal |

MOUNTING / CONNECTION

| | |
|-------------|------------------|
| Connection: | QuickConnect |
| Mounting: | Ceiling, Surface |

PRODUCT

| | |
|-----------------------------|----------------|
| Ingress Protection: | IP65 |
| Impact Protection: | IK08 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80B50: 50 000 |
| Color: | White |
| Height [mm]: | 60 |
| Width [mm]: | 300 |

ELECTRICAL DATA

| | |
|----------------------------|-----------|
| Dimming: | None |
| System Power [W]: | 15 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 83 |
| Max load pr circuit - B16: | 133 |
| Max load pr circuit - C10: | 83 |
| Max load pr circuit - C16: | 133 |
| Inrush current Imax [A]: | 25,6 |
| Inrush current time [µs]: | 20 |
| Socket / Cap-Base: | N/A |
| Voltage Forward Min [V]: | 25 |
| Voltage Forward Max [V]: | 42 |