




PRODUCT SHEET

Exilis II dim

Art. no: 2505-2-01-3



Exilis II dim

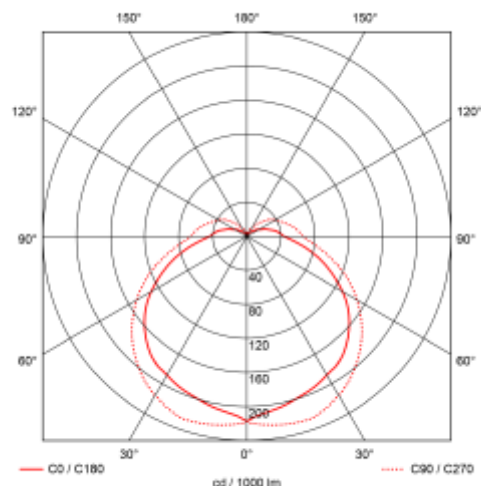

Our LED tube luminaire with a built in LED driver makes installation a breeze. The Exilis II comes in a variety of lengths that can be easily connected together without the use of tools, just by clicking the LED tubes together. The different lengths makes it very easy to make a continuous line of light regardless of the length of the surface. The Exilis II comes with a opal diffuser and phasecut dim. Max 500W for each feed.



SPECIFICATIONS

| | |
|--------------------------|---------------------------|
| System Power [W]: | 5W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen LED (tc=25): | 550lm |
| Beam Angle: | 120° |
| Lens (Diffuser): | Opal |
| Dimming: | Phase-Cut |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Exilis II 3-pin Connector |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 110lm/W |
| Color: | White |
| Length [mm]: | 295mm |
| Height [mm]: | 30mm |
| Width [mm]: | 22mm |