




PRODUCT SHEET

CBU Driver 350-1050mA cc 38W Bluetooth bDW SR TW 2-ch

Art. no: 28002584



CBU Driver 350-1050mA cc 38W Bluetooth bDW SR TW

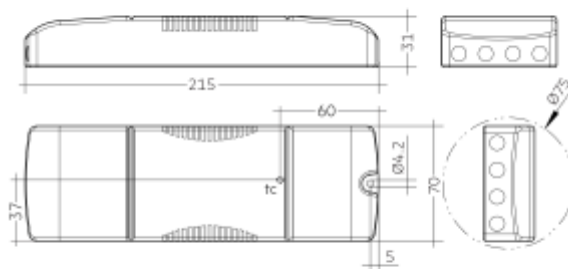

SPECIFICATIONS

System Power [W]:	38W
Dimming:	Casambi, CLO
CC or CV:	CC
CC [mA]:	350 - 1050mA
CC (forward voltage driver) [V]:	20 - 50V
Max output voltage [V]:	60
Output Current Tolerance [%]:	3%
Current Ripple [%]:	2%
Current setting:	CLO, I-Select 2 Plug (Tridonic)
Expected Lifetime:	100000h
Protection Class:	1 or 2
Max load pr circuit - B10:	10
Max load pr circuit - B16:	16
Max load pr circuit - C10:	16
Max load pr circuit - C16:	26
Leakage current [mA]:	0,5mA
Inrush current I _{max} [A]:	26A
Inrush current time [μs]:	224μs
Manufacture:	Tridonic