



PRODUCT SHEET



Benu Office Pullswitch / daylight sensor

Art. no: 3730-S-110-2

NORLUX®


Lighting Solutions

Benu Office Pullswitch / daylight sensor

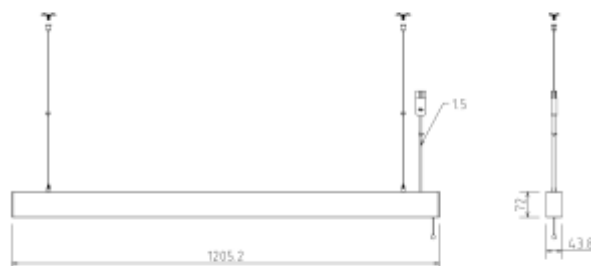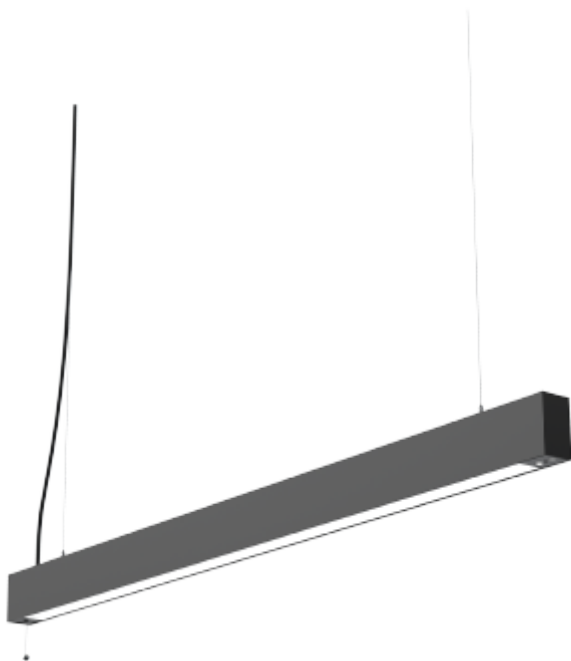

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	50W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	6520lm
Lumen LED (tc=25):	7200lm
Beam Angle:	110° / 75°
Lens (Diffuser):	Micropris.
Dimming:	Pull Dim, Sensor (PIR)
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	18i3 Quick connection
Mounting:	Suspended, Pendant, Ceiling
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	128lm/W
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	1205mm
Height [mm]:	76mm
Width [mm]:	43,8mm
Weight [kg]:	2,5kg

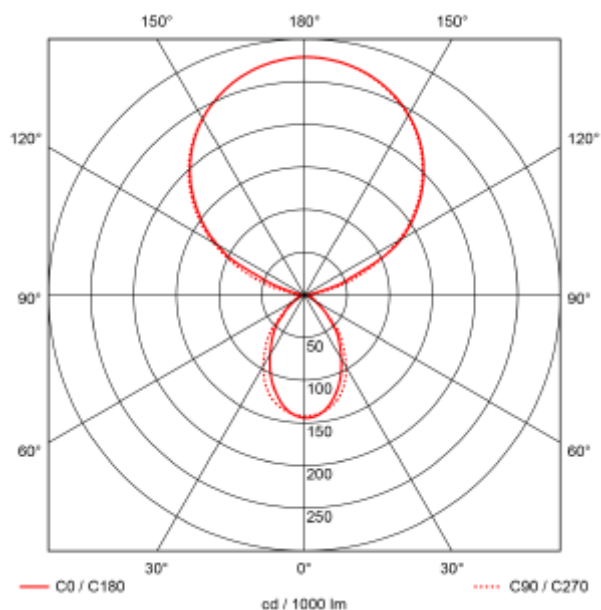

Benu is a linear LED luminaire with up- and down light for pending down in indoor areas. With motion and daylight sensor. If presence isn't detected, lamp brightness reduces to 30% after 30 minutes, after another 30 minutes the lamp switches off. When motion is detected, lamp will switch on. Daylight sensor will adjust lux throughout the day based on standard lux. See installation manual for detailed information. UGR19 and dimmable by pulling the rope. 18i3 connection, 3m transparent wire and t-profile bracket are included.