



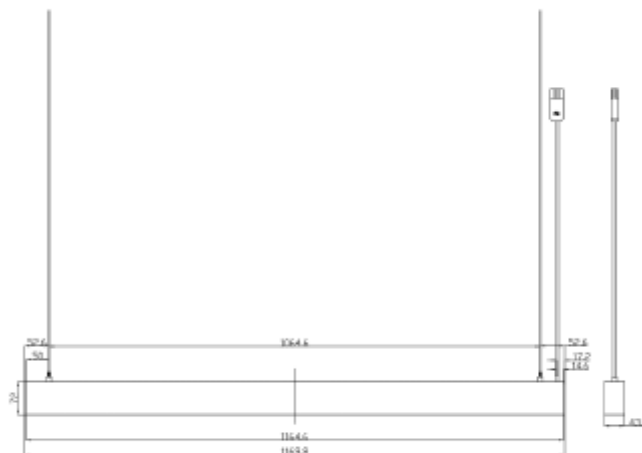

FDV SPEC SHEET

Benu Office DALI

Art. no: 3733-110-2-ddd

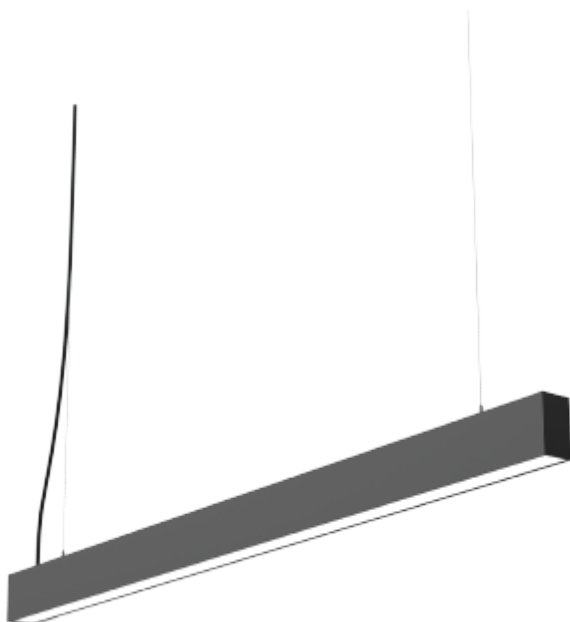

Benu Office DALI



Art. no: 3733-110-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	7000
Beam Angle:	110° / 75°
CCT (Color Temperature):	4000
CRI / Ra:	90
Color Code:	940
Lens (Diffuser):	Prismatic

MOUNTING / CONNECTION

Connection:	18i5 Quick connection
Mounting:	Suspended, Pendant, Ceiling

PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1170
Height [mm]:	76
Width [mm]:	43,8
Weight [kg]:	2,5

ELECTRICAL DATA

Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	28
Max load pr circuit - B16:	45
Max load pr circuit - C10:	28
Max load pr circuit - C16:	45
Inrush current Imax [A]:	8,31
Inrush current time [µs]:	201
Socket / Cap-Base:	N/A