




## FDV SPEC SHEET

Leila C Midi

Art. no: 6922-67-3



 165mm

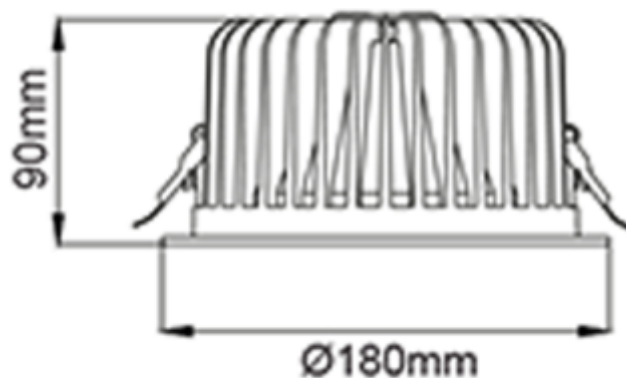

# Leila C Midi



Art. no: 6922-67-3

### LIGHT TECHNICAL

|                          |       |
|--------------------------|-------|
| Lumen Output:            | 1972  |
| Lumen LED (tc=25):       | 2200  |
| Beam Angle:              | 67°   |
| CCT (Color Temperature): | 4000  |
| CRI / Ra:                | 90    |
| Color Code:              | 940   |
| MacAdam (SDCM):          | 3     |
| Lens (Diffuser):         | Clear |

### MOUNTING / CONNECTION

|               |                     |
|---------------|---------------------|
| Connection:   | Depending on driver |
| Cut-out [mm]: | Ø165                |
| Mounting:     | Recessed, Ceiling   |

### PRODUCT

|                               |                 |
|-------------------------------|-----------------|
| To be recessed in insulation: | No              |
| Ingress Protection:           | IP20            |
| Operating Temperature [°C]:   | -25 - 50        |
| Lifetime [h]:                 | L80B10: 100 000 |
| Color:                        | White           |
| Height [mm]:                  | 120             |
| Width [mm]:                   | 180             |

### ELECTRICAL DATA

|                          |                     |
|--------------------------|---------------------|
| Dimming:                 | Depending on Driver |
| System Power [W]:        | 16                  |
| System Voltage [V]:      | 230V 50Hz           |
| Protection Class:        | 3                   |
| Socket / Cap-Base:       | N/A                 |
| Current Output [mA]:     | 400 (<800)          |
| Voltage Forward Min [V]: | 32,7                |
| Voltage Forward Max [V]: | 36,7                |