




## FDV SPEC SHEET

Via

Art. no: 714-2-04-1

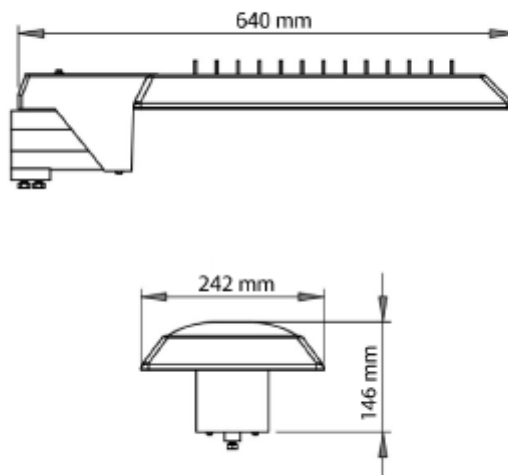

# Via



A++

Art. no: 714-2-04-1

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	8846
Lumen LED (tc=25):	10407
Beam Angle:	60°x120°
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Mast, Wall

### PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK08
Operating Temperature [°C]:	-25 - 40
Lifetime [h]:	L90B10: 100 000
Color:	Grey
Length [mm]:	640
Height [mm]:	146
Width [mm]:	242

### ELECTRICAL DATA

System Power [W]:	79
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	3
Max load pr circuit - B16:	7
Max load pr circuit - C10:	6
Max load pr circuit - C16:	14
Leakage current [mA]:	0,5
Inrush current I <sub>max</sub> [A]:	56
Inrush current time [μs]:	280
Current Output [mA]:	1050