



PRODUCT SHEET

Caph

Art. no: 9035-S-120-3




Caph



SPECIFICATIONS

| | |
|--------------------------|------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 24W |
| CCT (Color Temperature): | 3/4/5700 |
| CRI / Ra: | 80 |
| Lumen Output: | 2665lm |
| Lumen LED (tc=25): | 2700lm |
| Beam Angle: | 120° |
| Lens (Diffuser): | Opal |
| Dimming: | Sensor (MW) |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Ceiling, Surface |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 119lm/W |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 90mm |
| Width [mm]: | 330mm |
| Weight [kg]: | 0,84kg |

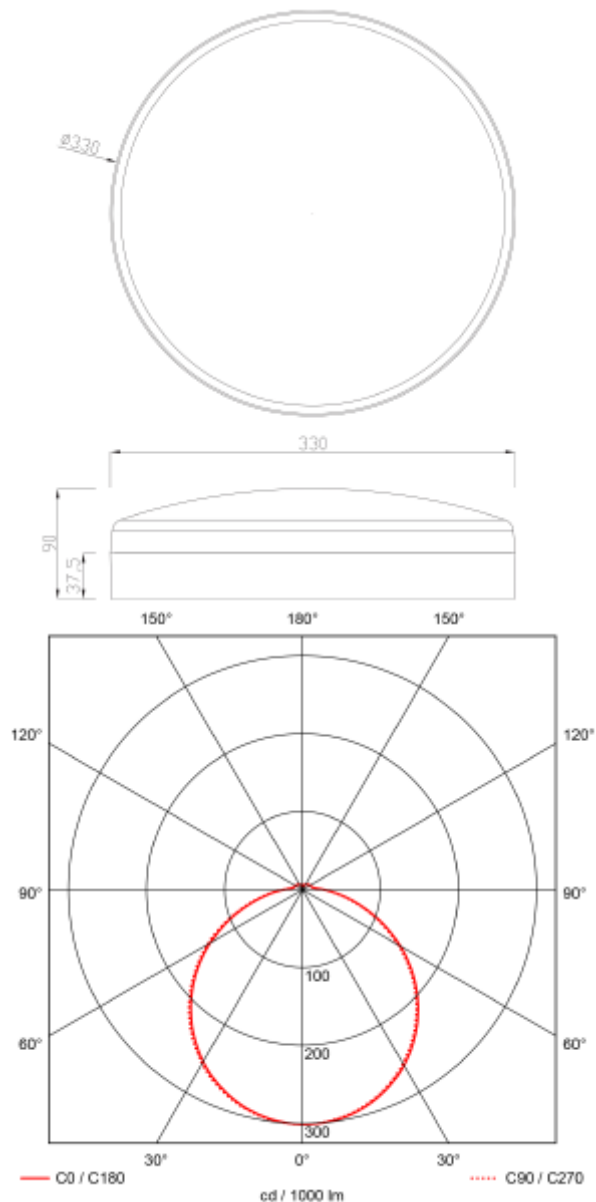

Caph is as surface mounted ceiling light with opal diffuser and microwave motion and daylight sensor.

Default setting sensor: Hold time 5mins, daylight off.

Comes with a switch option between 3000K(default), 4000K and 5700K. Quickconnect for easy installation.

All data is based on 4000K