

Data sheet

Commercial Art.No.: 92.931.3053.1

connector GST18I3S B1CZR1 SW

gesis® CLASSIC connector, number of poles 3, female, connection type screw connection, rated voltage 250 V, rated current 20 A, cable diameter 6.5 - 10.5 mm, color of coding/ contact carrier black



Commercial Art.No.	92.931.3053.1
EAN	4015573721852
Order Unit	1

certificates / approvals



Technical data

general

rated current	20 A
rated voltage	250 V
rated impulse voltage	4 kV
strain relief	yes
pollution degree	2
mechanical coding	code 1
lockable	self-locking (unlocking by tool)
color of coding/ contact carrier	black
Pole codification	L, N, PE
color of housing inclusive strain relief	black
RAL-Nummer Codierung/Kontakteinsatz	9005

connection data

cable diameter max.	10.5 mm
cable diameter min.	6.5 mm
connection cross section solid mm² max.	2.5 mm²
connection cross section solid mm² min.	0.75 mm²
connection cross section fine stranded mm² max.	2.5 mm²
connection cross section fine stranded mm² min.	0.75 mm²
terminations per pole	1
sheath strip length	38.5 mm
wire strip length	7 mm

model

model	female
-------	--------

connection type	screw connection
degree of protection (IP)	IP40

material

housing material	polyamide
halogen free	yes
contact material	CuZn
fire load	0.089 kWh/St
insulation components continuous temperature	100 °C
surface finish	tin-plated

dimensions

length	69.4 mm
width	28.2 mm
height	12.6 mm

classification


ECLASS 11	
ECLASS 8.1	27440605
ETIM 9.0	EC002560
ETIM 8.0	EC002560
ETIM 7.0	EC002560
ETIM 6.0	EC002560
ETIM 5.0	EC002560
ETIM 4.0	EC002560

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1


Accessories

Commercial Art.No.:	Article-type description:	Description:
05.587.3156.0	lock (G)ST18 WS	Locking device for cable to cable connection GST18i3-5, white
06.561.7853.0	mounting frame GST18i3 SW	Mounting frame to snap in GST18i3 connectors into a housing or furniture. Wall thickness: 1,5-2,5 mm. Holds GST18i3 connectors with screw or spring connection and pre- assembled cables.
05.561.3653.0	cover cap GST18i3VS B WS	Cover piece for female GST18i3, white
05.561.3653.1	cover cap GST18i3VS B SW	Cover piece for female GST18i3, black
05.564.5353.0	cover cap GST18i3/4/5 SW	Cover piece 12 pole black for female parts GST18i3-6
05.564.5353.2	cover cap GST18i3/4/5 WS	Cover piece 12 pole white for female parts GST18i3-6
05.594.4250.0	cover cap ST18/3B + GST18i3 ST WS	
05.594.4253.0	cover cap ST18/3B + GST18i3 ST WS	
05.587.3156.1	lock (G)ST18 SW	Locking device for cable to cable connection GST18i3-5, black

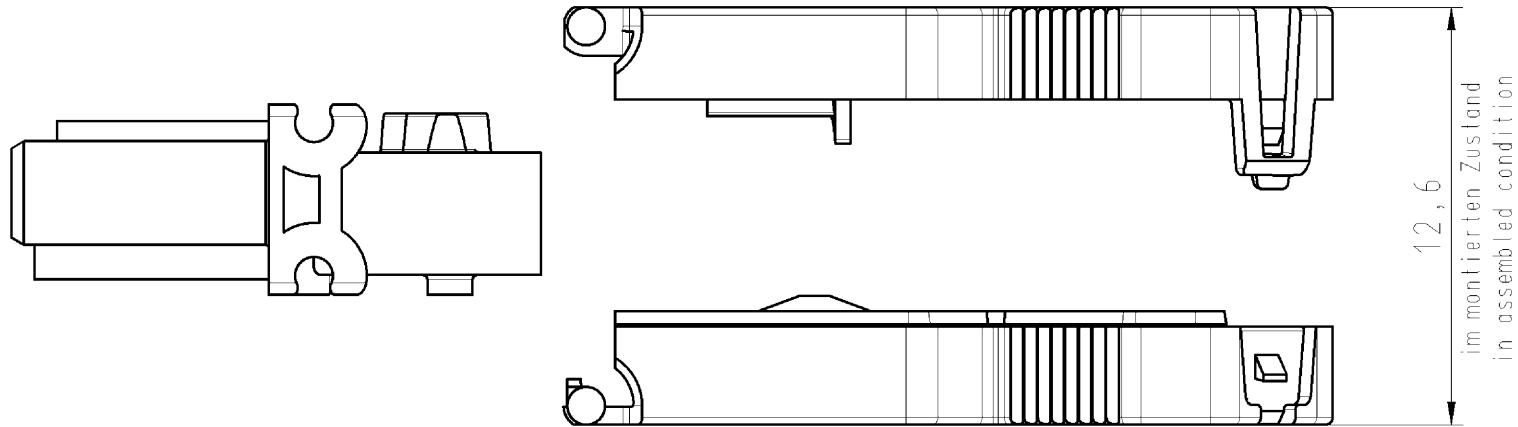

Auslieferungszustand: unmontiert
delivery condition: unmounted


Ansicht in Pfeilrichtung X im montierten Zustand
view in arrow direction X, drawn in assembled condition

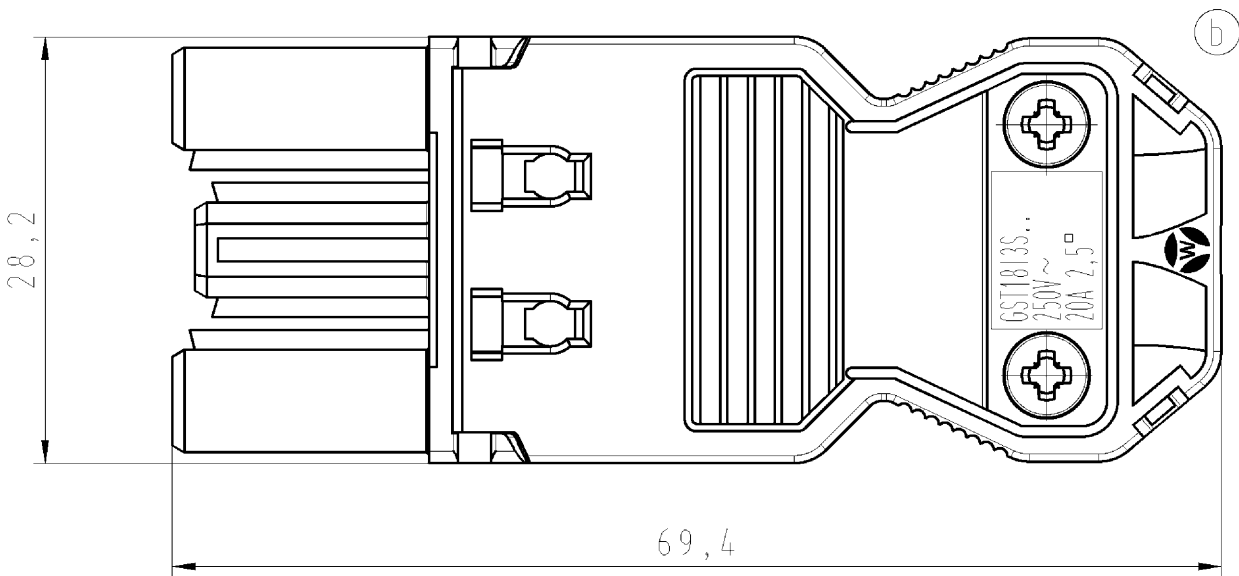

Weitere Daten siehe Katalog
further data see catalog

Teile-Nr. part-no	Farbe colour	Typ type
92.931.3053.0	weiß white	GST1813S B1 ZR1 WS
92.931.3053.1	schwarz black	GST1813S B1 ZR1 SW

M 1:1

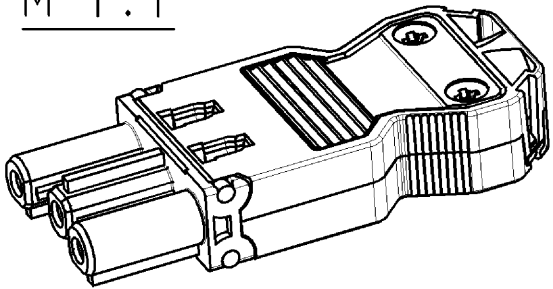

Tolerierung Size ISO 14405/Tolerance system Size ISO 14405. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declaimable hazardous substances) to be declared!			
Freitoleranz nach - General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1.Verwendung: - First Use:		Blatt: 1 von 1 Sheet: of	
		Werkstoff/Material		2005	Tag/Date	Name	
				gezeichnet drawn	22.09.	Schmitt J.	
		Maßstab/Scale		geprüft checked	-	-	
		%		Normgepr. Stand. check	-	-	
		Vol. mm³		Ofl./Surf. mm²			
		Ersatz für/Replacement for: -					
b	22.10.2012/	wieland Elektrische Verbindungen		Type	Benennung/Title FEMALE CONNECTOR WITH STRAIN RELIEF		
a	26.10.2007/			BUCHSENTEIL MIT ZUGENTLASTUNG			
Index	Datum / Blatt Date / Sheet			Install.-Steckverb. m. Schraubanschl./connector with screw connection			
Änderung/Revision				s. Tabelle see table	b 250V AC 20A 2,5qmm		

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

929313053001K_2 CADW2037 deutsch 2012-10-24T08:28:40 1.000