




PRODUCT FAMILY SHEET

Pollux



Lighting Solutions

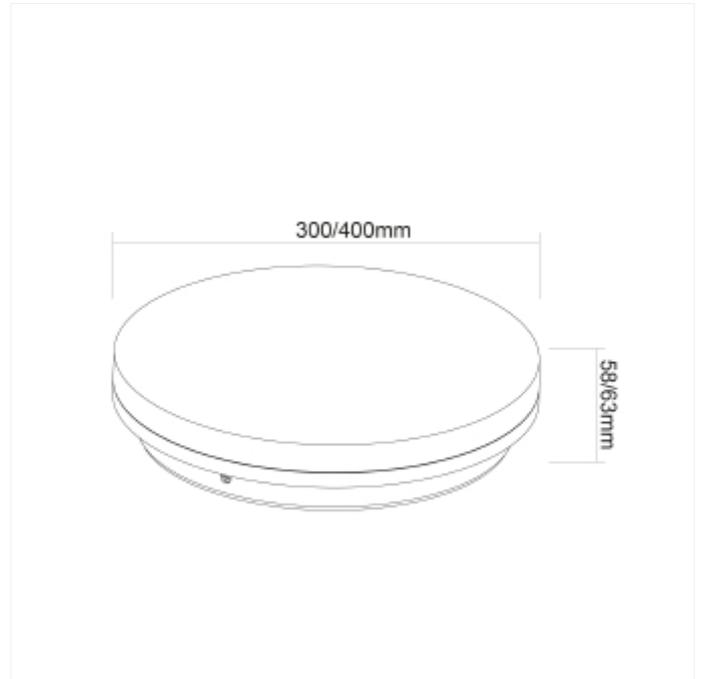

Pollux

Pollux is a surface mounted ceiling light that adopts high lumen SMD LED, fire-rated PC diffuser with even light output. IP54 waterproof structural design, it s an ideal replacement for wet locations. Comes with a switch option between 3000K (default), 4000K and 5700K. QuickConnect for easy installation. All data is based on 4000K.

VERSIONS

Art.No	Effect [W]	Cold Lumen [lm]	Lumen Output [lm]	CCT [K]	Beam Angle [°]	Lens Difuser	CRI [>]	Color	Light Control	Connection
2114-S-120-3	15	1600	1480 (4000K)	3/4/5700	120	Opal	80	White	Sensor (MW)	QuickConnect
2112-120-3	18	1750	1644 (4000K)	3/4/5700	120	Opal	80	White	None	QuickConnect
2112-S-120-3	25	2800	2670	3/4/5700	120	Opal	80	White	Sensor (MW)	QuickConnect
2113-120-3	30	3300	3150(4000K)	3/4/5700	120	Opal	80	White	None	QuickConnect