




PRODUCT FAMILY SHEET

T-Line

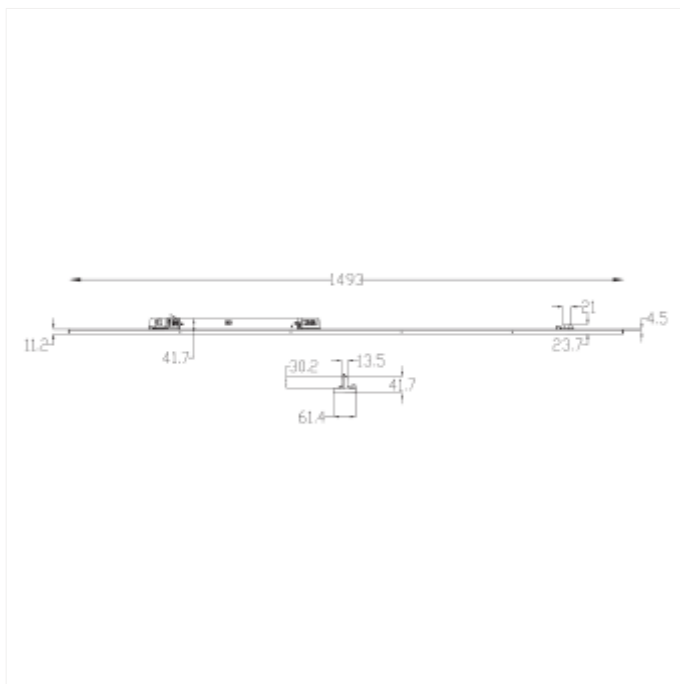

T-Line

T-Line is our new luminaire for mounting directly into 3-phase track. By using DIP-switch on the wattage setting, you can adjust power to optimize your wattage setting. Choose between 35/40/45W. Preset is set at 50W. T-line comes in 3000K or 4000K with 90°, 120° or double asymmetric beam.

VERSIONS

Art.No	Effect [W]	Cold Lumen [lm]	Lumen Output [lm]	CCT [K]	Beam Angle [°]	Lens Difuser	CRI [>]	Color	Light Control	Connection
5035-90-3	50(45-60)	7500	7132	3000	90°	Lens	90	White	None	Track 3-Circuit
5040-90-3	50	8200	7975	4000	90°	Lens	80	White	None	Track 3-Circuit
5030-90-2	35-50	7800	7734	3000	90°	Lens	80	Black	None	Track 3-Circuit
5030-90-3	35-50	7800	7734	3000	90°	Lens	80	White	None	Track 3-Circuit
5031-90-3	14-20	3400	3200	3000	90°	Lens	80	White	None	Track 3-Circuit
5036-90-3	14-20	3250		3000	90°	Lens	90	White	None	Track 3-Circuit
5035-90-2-ddd	35-50	7500	7132	3000	90°	Lens	90	Black	DALI	Track 3-Circuit+dim
5035-90-2	50(45-60)	7500		3000	90°	Lens	90	Black	None	Track 3-Circuit