




FDV SPEC SHEET

Yil
Art. no: 10102-2-01-5-ddd

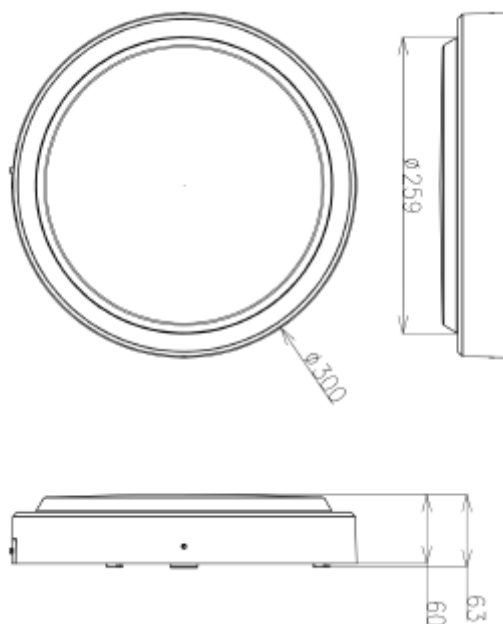

Yil



Art. no: 10102-2-01-5-ddd

LIGHT TECHNICAL

Lumen LED (tc=25):	2700
Beam Angle:	120°
CCT (Color Temperature):	3/4/5700
CRI / Ra:	90
Color Code:	930/940/957
Lens (Diffuser):	PC Opal

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Ceiling, Wall

PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK10
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Dark Grey
Housing Material :	Aluminium

ELECTRICAL DATA

Dimming:	DALI2
System Power [W]:	20/25
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	48
Max load pr circuit - B16:	76
Max load pr circuit - C10:	48
Max load pr circuit - C16:	76
Leakage current [mA]:	0,7