




FDV SPEC SHEET

Zoom Spotlight

Art. no: 101141-660-3-p

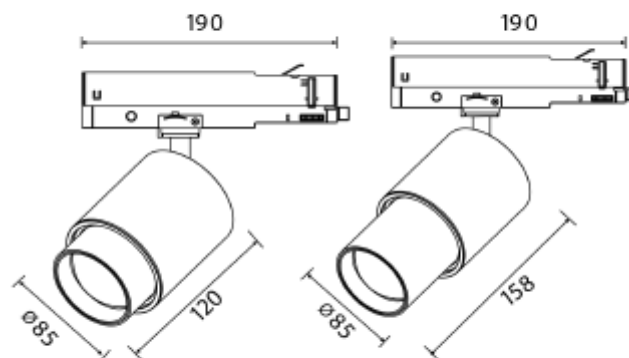

Zoom Spotlight



Art. no: 101141-660-3-p

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen LED (tc=25): | 1750 |
| Beam Angle: | 6-60 |
| CCT (Color Temperature): | 2700 |
| CRI / Ra: | 90 |
| Color Code: | 927 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting: | Track |

ELECTRICAL DATA

| | |
|------------------------------------|----------------------|
| Dimming: | Phase-Cut |
| Flickerfree: | Yes |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 20 |
| System Voltage [V]: | 230V 50Hz |
| Dimming Output Type: | Amplitude Modulation |
| Dimming Phasecut Type: | Trailing edge |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 28 |
| Max load pr circuit - B16: | 46 |
| Max load pr circuit - C10: | 28 |
| Max load pr circuit - C16: | 46 |
| Inrush current Imax [A]: | 15 |
| Inrush current time [µs]: | 40 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 500 |
| Voltage Forward Min [V]: | 35 |
| Voltage Forward Max [V]: | 40 |



FDV SPEC SHEET

Zoom Spotlight

Art. no: 101141-660-3-p



PRODUCT

| | |
|---------------------|-----------------|
| Ingress Protection: | IP20 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| RAL: | RAL9003 |
| Length [mm]: | 158 |
| Diameter [mm]: | 85 |
| Weight [kg]: | 1 |
| Housing Material : | Aluminium |