




## FDV SPEC SHEET

Petrol

Art. no: 101422-3

# NORLUX®

Lighting Solutions

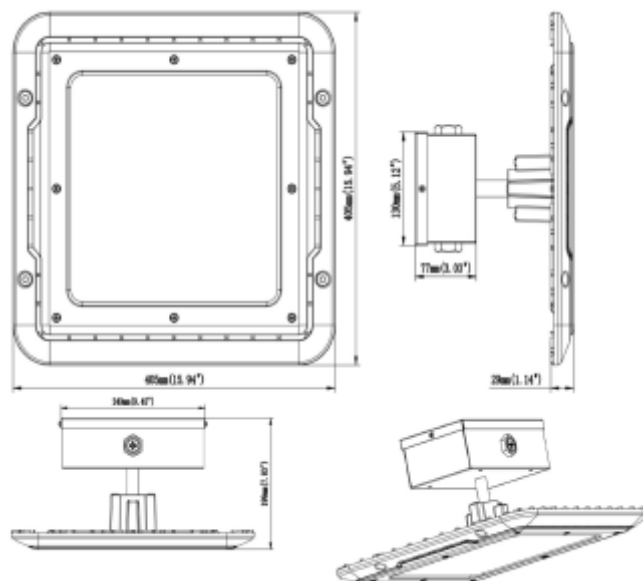

## Petrol



C

Art. no: 101422-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	20130
Lumen LED (tc=25):	21000
Beam Angle:	90°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	5

### PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK08
Color:	White
RAL:	RAL9016
Length [mm]:	405
Height [mm]:	199
Width [mm]:	405
Weight [kg]:	6,1

### ELECTRICAL DATA

Dimming:	1-10V
Dimming Output Type:	Amplitude Modulation
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	0,009
Stroboscopic effect metric (SVM) <	0,012
System Power [W]:	150
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	3
Max load pr circuit - B16:	6
Max load pr circuit - C10:	6
Max load pr circuit - C16:	10
Leakage current [mA]:	0,75
Inrush current Imax [A]:	110
Inrush current time [µs]:	200
Socket / Cap-Base:	N/A

### MOUNTING / CONNECTION

Mounting:	Recessed, Ceiling, Surface
-----------	----------------------------