




## FDV SPEC SHEET

Gyre Up&Down 800lm 830 24° 10W BK  
Art. no: 101520-24-2

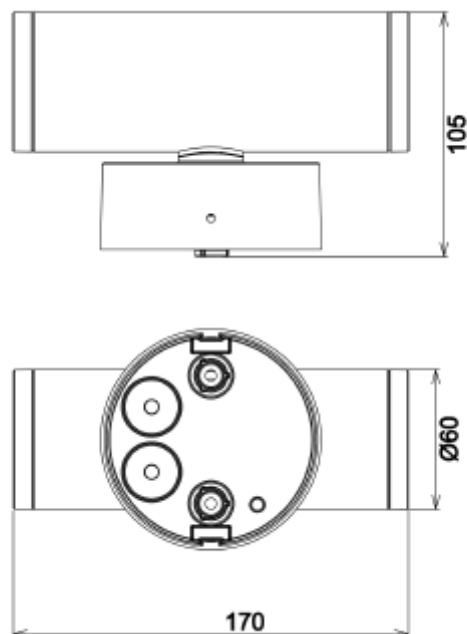

# Gyre Up&Down 800lm 830 24° 10W BK



Art. no: 101520-24-2

### LIGHT TECHNICAL

|                          |       |
|--------------------------|-------|
| Lumen Output:            | 760   |
| Lumen LED (tc=25):       | 800   |
| Beam Angle:              | 24°   |
| CCT (Color Temperature): | 3000  |
| CRI / Ra:                | 80    |
| Color Code:              | 830   |
| MacAdam (SDCM):          | 3     |
| Lens (Diffuser):         | Clear |

### MOUNTING / CONNECTION

|             |              |
|-------------|--------------|
| Connection: | QuickConnect |
| Mounting:   | Wall         |

### ELECTRICAL DATA

|                                      |           |
|--------------------------------------|-----------|
| Dimming:                             | None      |
| System Power [W]:                    | 10        |
| System Voltage [V]:                  | 230V 50Hz |
| Protection Class:                    | 1         |
| Max load pr circuit - B10:           | 95        |
| Max load pr circuit - B16:           | 152       |
| Max load pr circuit - C10:           | 90        |
| Max load pr circuit - C16:           | 152       |
| Leakage current [mA]:                | 0,75      |
| Inrush current I <sub>max</sub> [A]: | 6,2       |
| Inrush current time [μs]:            | 65        |
| Socket / Cap-Base:                   | N/A       |
| Current Output [mA]:                 | 230       |



## FDV SPEC SHEET

Gyre Up&Down 800lm 830 24° 10W BK

Art. no: 101520-24-2



| PRODUCT                     |                |
|-----------------------------|----------------|
| Ingress Protection:         | IP65           |
| Impact Protection:          | IK06           |
| Operating Temperature [°C]: | -20 - 40       |
| Lifetime [h]:               | L80B10: 50.000 |
| Color:                      | Black          |
| RAL:                        | RAL9005        |
| Length [mm]:                | 105            |
| Height [mm]:                | 170            |
| Width [mm]:                 | 60             |
| Weight [kg]:                | 0,6            |