



## PRODUCT SHEET





Gyre Up&Down 800lm 830 24° 10W BK

Art. no: 101520-24-2


# NORLUX®

Lighting Solutions

## Gyre Up&Down 800lm 830 24° 10W BK

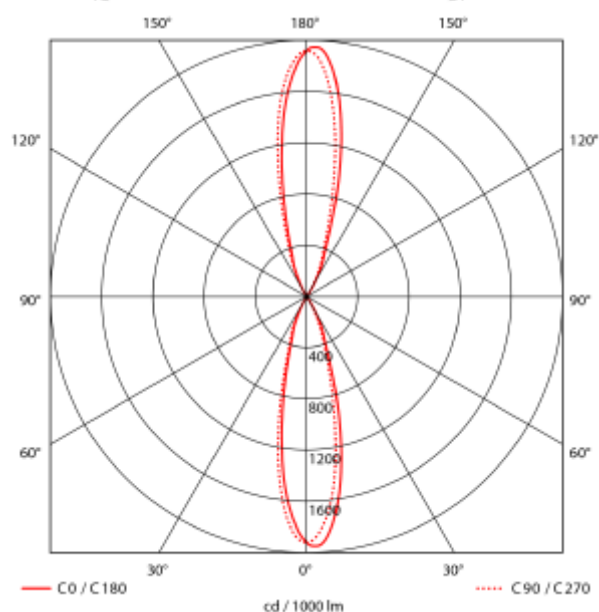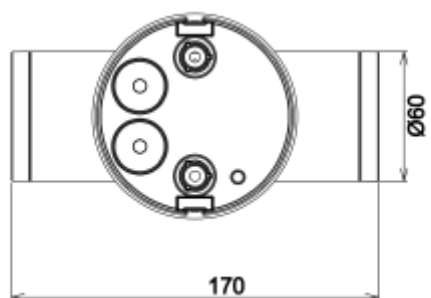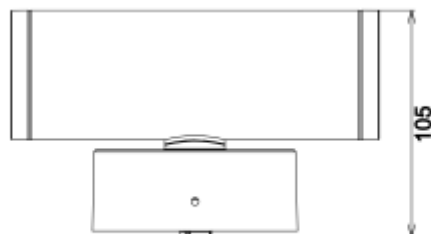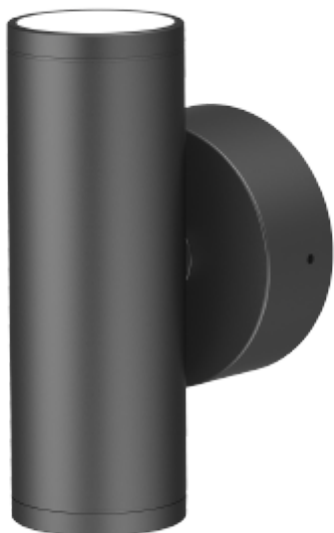

Wall mounted luminaire with up / downlight for outdoors use.  
Delivered with 3000K and 24° beam angle. Made of die-cast aluminum.



### SPECIFICATIONS

System Power [W]:	10W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	760lm
Lumen LED (tc=25):	800lm
Beam Angle:	24°
Lens (Diffuser):	Clear
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Wall
Lifetime [h]:	L80B10: 50.000h
Lumen/W:	76lm/W
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	105mm
Height [mm]:	170mm
Width [mm]:	60mm
Weight [kg]:	0,6kg