



PRODUCT SHEET


Icarus 500lm 927 36° 7W WH phasecut Isosafe

Art. no: 101970-36-3

NORLUX®


Lighting Solutions

Icarus 500lm 927 36° 7W WH phasecut Isosafe

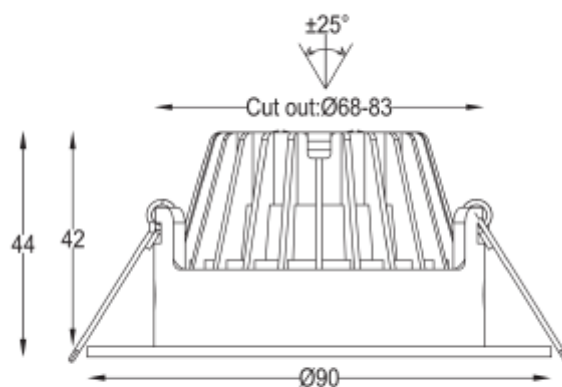

SPECIFICATIONS

| | |
|-------------------------------|-----------------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 7W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 95 |
| Lumen Output: | 500lm |
| Lumen LED (tc=25): | 600lm |
| Beam Angle: | 36 |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Recessed |
| Cut-out [mm]: | 68-83mmmm |
| Lifetime [h]: | L80: 100 000h |
| Lumen/W: | 71lm/W |
| UGR (<=): | 28 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 44mm |
| Diameter [mm]: | 90mm |
| Weight [kg]: | 0,361111111111111kg |
| Emergency light [h]: | No Emergency light |
| To be recessed in insulation: | Yes, recessed in insulation |

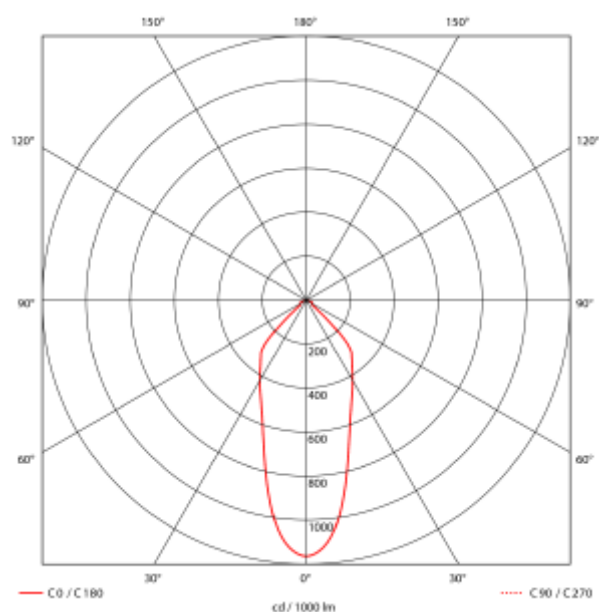

7W downlight that can be installed directly into insulation. Cutout Ø68-83mm makes it perfect for rehab and new installation. Tilttable 25°, CRI>95 and flickerfree phasecut driver.