




## FDV SPEC SHEET

Leila R

Art. no: 102221-01-3

# NORLUX®

Lighting Solutions

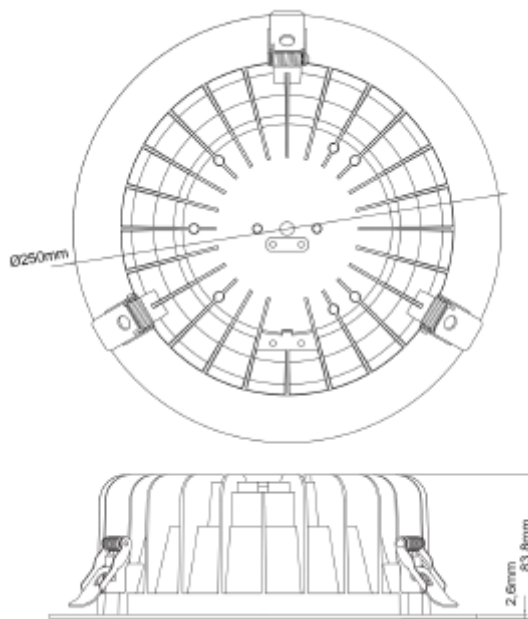

## Leila R



Art. no: 102221-01-3

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 1095           |
| Lumen LED (tc=25):       | 1500           |
| Beam Angle:              | 70°            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 90             |
| Color Code:              | 930            |
| MacAdam (SDCM):          | 2              |
| Lens (Diffuser):         | Opal           |

### MOUNTING / CONNECTION

|               |                     |
|---------------|---------------------|
| Connection:   | Depending on driver |
| Cut-out [mm]: | 210-240             |
| Mounting:     | Recessed, Ceiling   |

### PRODUCT

|                               |                 |
|-------------------------------|-----------------|
| To be recessed in insulation: | No              |
| Ingress Protection:           | IP20            |
| Lifetime [h]:                 | L80B10: 100 000 |
| Color:                        | White           |
| Height [mm]:                  | 84              |
| Diameter [mm]:                | 250             |

### ELECTRICAL DATA

|                          |                     |
|--------------------------|---------------------|
| Dimming:                 | Depending on Driver |
| System Power [W]:        | 13                  |
| System Voltage [V]:      | 230V 50Hz           |
| Protection Class:        | 2                   |
| Current Output [mA]:     | 350                 |
| Voltage Forward Min [V]: | 31                  |
| Voltage Forward Max [V]: | 34                  |