




**FDV SPEC SHEET**  
Cylinder 60 G2  
Art. no: 102261-36-3-ddd



## Cylinder 60 G2

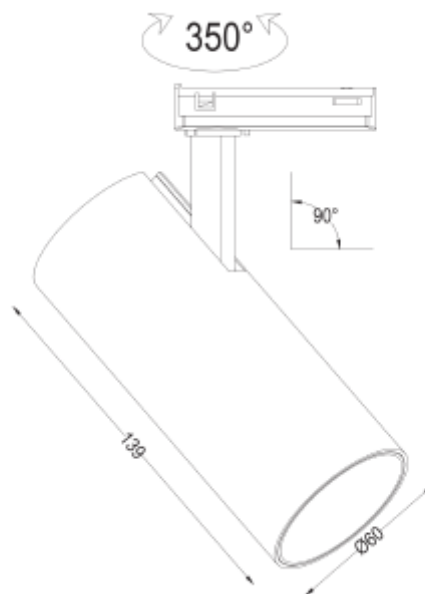

Art. no: 102261-36-3-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1420
Lumen LED (tc=25):	2100
Beam Angle:	36
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track



## FDV SPEC SHEET

Cylinder 60 G2  
Art. no: 102261-36-3-ddd



PRODUCT		ELECTRICAL DATA	
Ingress Protection:	IP20	Dimming:	DALI2
Impact Protection:	IK02	Flickerfree:	Yes
Operating Temperature [°C]:	-20 - 45	Standby power Psb (W) <:	0,5
Lifetime [h]:	L80: 100 000	Flicker metric (Pst LM) <:	1
Color:	White	Stroboscopic effect metric (SVM) <	0,4
RAL:	RAL9010	System Power [W]:	15
Length [mm]:	130	System Voltage [V]:	230V 50Hz
Height [mm]:	130	Dimming Output Type:	Amplitude Modulation
Diameter [mm]:	60	Protection Class:	2
Weight [kg]:	0,56	Max load pr circuit - B10:	17
Housing Material :	Aluminium	Max load pr circuit - B16:	27
Diffuser Material:	Aluminium	Max load pr circuit - C10:	28
Material 2:	Polycarbonate	Max load pr circuit - C16:	44
		Leakage current [mA]:	0,25
		Inrush current Imax [A]:	18
		Inrush current time [µs]:	2,8
		Socket / Cap-Base:	N/A
		Current Output [mA]:	350
		Voltage Forward Min [V]:	32
		Voltage Forward Max [V]:	36,2
		Emergency light [h]:	No Emergency light