




**FDV SPEC SHEET**  
C Line  
Art. no: 102517-2-00-1-ddd



## C Line

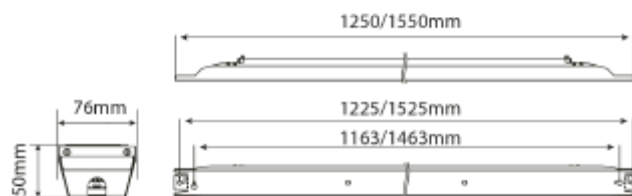

Art. no: 102517-2-00-1-ddd

LIGHT TECHNICAL	
Lightsource Type:	LED (replaceable)
Lumen Output:	17500
Lumen LED (tc=25):	19800
Beam Angle:	60°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

ELECTRICAL DATA	
Dimming:	DALI2
Flickerfree:	Yes
System Power [W]:	100
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	5
Max load pr circuit - B16:	8
Max load pr circuit - C10:	8
Max load pr circuit - C16:	14
Leakage current [mA]:	0,45

MOUNTING / CONNECTION	
Connection:	Quickconnectx2
Mounting:	Ceiling, Surface



## FDV SPEC SHEET

C Line  
Art. no: 102517-2-00-1-ddd



PRODUCT	
Ingress Protection:	IP23
Impact Protection:	IK10
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	Steel
Length [mm]:	1550
Height [mm]:	50
Width [mm]:	76
Weight [kg]:	2,54