




FDV SPEC SHEET

Benu Slim Office Pullswitch
Art. no: 102521-140-3

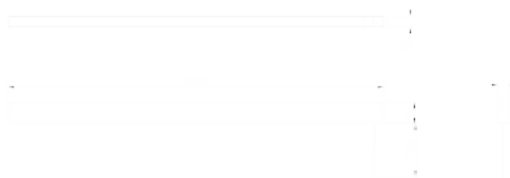

Benu Slim Office Pullswitch



Art. no: 102521-140-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7145
Lumen LED (tc=25):	8216.75
Beam Angle:	120° / 80°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	18i3 with 2.7m cable
Through-wiring (mm2):	3x0,75
Mounting:	Suspended, Pendant, Ceiling



FDV SPEC SHEET

Benu Slim Office Pullswitch

Art. no: 102521-140-3



PRODUCT		ELECTRICAL DATA	
Ingress Protection:	IP20	Dimming:	DALI2
Impact Protection:	IK02	Dimming Output Type:	Amplitude Modulation
Operating Temperature [°C]:	-20 - 40	Flickerfree:	Yes
Lifetime [h]:	L80B10: 100 000	Standby power Psb (W) <:	0,5
Color:	White	Flicker metric (Pst LM) <:	0,003
RAL:	RAL9016	Stroboscopic effect metric (SVM) <	0,006
Length [mm]:	1206	System Power [W]:	50
Height [mm]:	70	System Voltage [V]:	230V 50Hz
Width [mm]:	35	Protection Class:	2
Weight [kg]:	1,95	Max load pr circuit - B10:	28
Housing Material :	Aluminium 6063	Max load pr circuit - B16:	45
		Max load pr circuit - C10:	28
		Max load pr circuit - C16:	45
		Leakage current [mA]:	0,7
		Inrush current Imax [A]:	4,75
		Inrush current time [µs]:	162
		Socket / Cap-Base:	N/A
		Current Output [mA]:	1050
		Voltage Forward Min [V]:	2,5
		Voltage Forward Max [V]:	3