




## FDV SPEC SHEET

Iota G2

Art. no: 102671-02-2

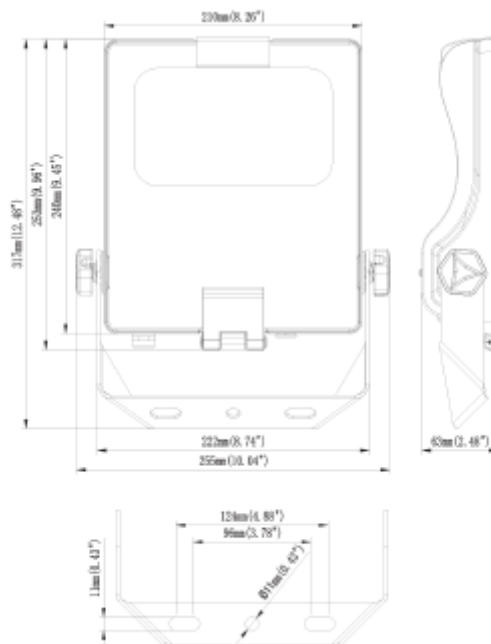

## Iota G2



Art. no: 102671-02-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	6800
Lumen LED (tc=25):	7700
Beam Angle:	55x125
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
MacAdam (SDCM):	5
Lens (Diffuser):	Lens

### MOUNTING / CONNECTION

Connection:	Cable 1.5m
Mounting:	Wall



## FDV SPEC SHEET

Iota G2

Art. no: 102671-02-2



PRODUCT	
Ingress Protection:	IP66
Impact Protection:	IK08
Corrosion Class:	C3
Wind force (EPA) [m2] at 0°:	0,05
Surge Protection:	L-N = 4KV, L-N = 6KV
Operating Temperature [°C]:	-30 - 50
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9017
Length [mm]:	317
Height [mm]:	255
Width [mm]:	63
Weight [kg]:	2,5

ELECTRICAL DATA	
Dimming:	None
Dimming Output Type:	Amplitude Modulation
Flickerfree:	No
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	0,075
Stroboscopic effect metric (SVM) <	1,78
System Power [W]:	50/37,5/25/15
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	11
Max load pr circuit - B16:	18
Max load pr circuit - C10:	18
Max load pr circuit - C16:	30
Leakage current [mA]:	0,7
Inrush current Imax [A]:	31
Inrush current time [µs]:	170
Socket / Cap-Base:	N/A
Current Output [mA]:	117mA
Voltage Forward Min [V]:	5,6
Voltage Forward Max [V]:	6,2