




PRODUCT SHEET

Iota G2

Art. no: 102679-02-2



Iota G2

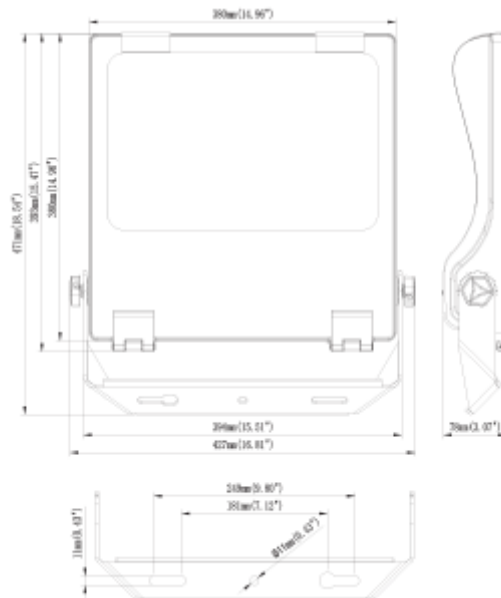

| SPECIFICATIONS | |
|--------------------------|------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 300/225/150/90W |
| CCT (Color Temperature): | 4000K |
| CRI / Ra: | 70 |
| Lumen Output: | 44200lm |
| Lumen LED (tc=25): | 46000lm |
| Beam Angle: | 55x125 |
| Lens (Diffuser): | Lens |
| Dimming: | None |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Cable 1.5m |
| Mounting: | Wall |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 147lm/W |
| MacAdam (SDCM): | 5 |
| Color: | Black |
| Length [mm]: | 471mm |
| Height [mm]: | 427mm |
| Width [mm]: | 78mm |
| Weight [kg]: | 8,1kg |

Iota G2 is a highly cost-effective floodlight that comes with a power switch in various sizes, equipped with front clips for easy access to the dip switch. It is equipped with asymmetric optics that make it ideal for a variety of applications. For post mounting, a mounting bracket can be purchased separately. With a solid IP rating of IP66, it is perfect for outdoor use in various environments.