





FDV SPEC SHEET

Cilla Mini

Art. no: 102720-30-3

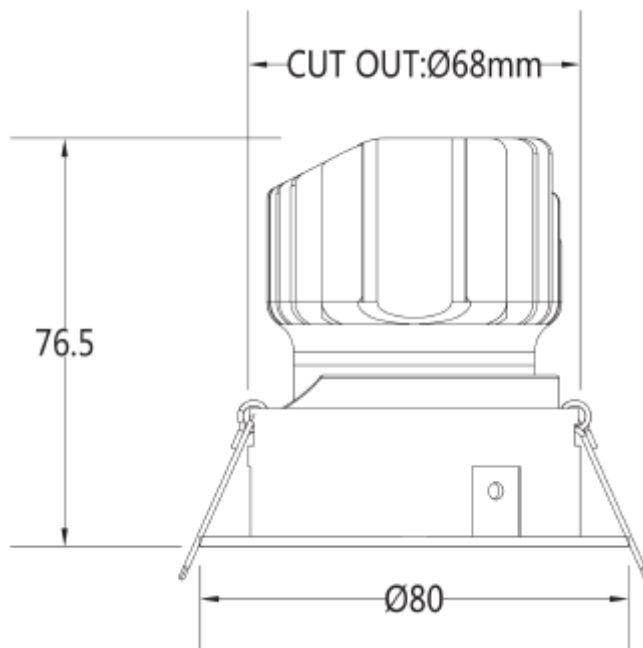

Cilla Mini



Art. no: 102720-30-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	670
Lumen LED (tc=25):	1100
Beam Angle:	30
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	68mm
Mounting:	Recessed



FDV SPEC SHEET

Cilla Mini

Art. no: 102720-30-3



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	Yes, recessed in insulation	UGR (<=):	19
Ingress Protection:	IP44	Dimming:	Phase-Cut
Impact Protection:	IK02	Dimming Output Type:	Amplitude Modulation
Operating Temperature [°C]:	-20 - 45	Dimming Phasecut Type:	Leading / Trailing edge
Lifetime [h]:	L80: 100 000	Flickerfree:	Yes
Color:	White	Standby power Psb (W) <:	0,5
RAL:	RAL9010	Flicker metric (Pst LM) <:	1
Length [mm]:	80	Stroboscopic effect metric (SVM) <	0,4
Height [mm]:	76,5	System Power [W]:	7
Width [mm]:	80	System Voltage [V]:	230V 50Hz
Diameter [mm]:	80	Protection Class:	2
Weight [kg]:	0,3666666666666667	Max load pr circuit - B10:	140
Housing Material :	Aluminium	Max load pr circuit - B16:	224
Diffuser Material:	Aluminium	Max load pr circuit - C10:	280
Material 2:	Srpings	Max load pr circuit - C16:	448
		Leakage current [mA]:	5
		Inrush current Imax [A]:	5
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	150
		Voltage Forward Min [V]:	33
		Voltage Forward Max [V]:	38
		Emergency light [h]:	No Emergency light
		Emergency light testing:	N/A