




FDV SPEC SHEET

Cilla Midi

Art. no: 102730-30-2

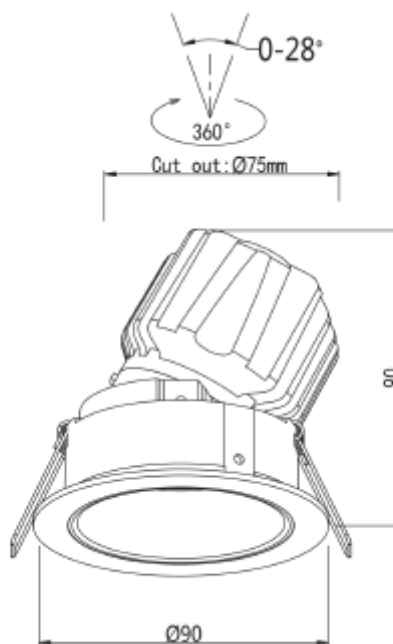

Cilla Midi



Art. no: 102730-30-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1428
Lumen LED (tc=25):	2197
Beam Angle:	30
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Cut-out [mm]:	75-80mm
Mounting:	Recessed

ELECTRICAL DATA

UGR (<=):	19
Dimming:	Depending on Driver
Flickerfree:	Yes
System Power [W]:	13
System Voltage [V]:	230V 50Hz
Protection Class:	3
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Voltage Forward Min [V]:	33
Voltage Forward Max [V]:	38
Emergency light [h]:	No Emergency light



FDV SPEC SHEET

Cilla Midi

Art. no: 102730-30-2



PRODUCT	
To be recessed in insulation:	Yes, recessed in insulation
Ingress Protection:	IP44
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80: 100 000
Color:	Black
RAL:	RAL9005
Length [mm]:	90
Height [mm]:	91
Width [mm]:	90
Diameter [mm]:	90
Weight [kg]:	0,2944444444444444
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Srpings